



PC1/GB 2003 / 0 0 5 1 4 6



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales


NP10 8QQ	
REC'D 24 FEB 2004	
WIPO	PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

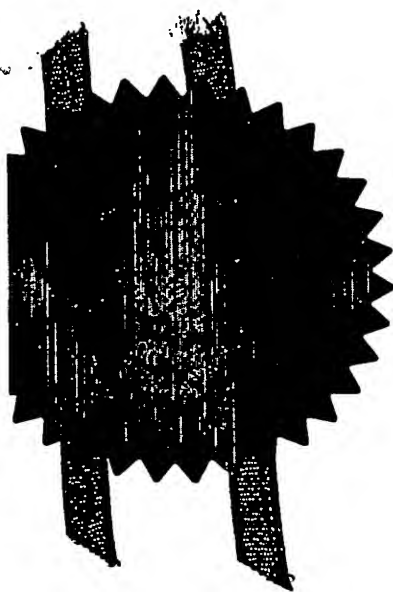


Signed

He Behen

Dated

3 February 2004

BEST AVAILABLE COPY

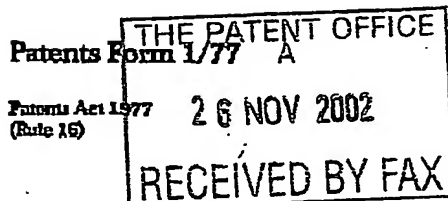

The
Patent
Office

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference	P100792GB	26 NOV 2002
2. Patent application number (The Patent Office will fill in this part)	0227514.7	26NOV02 1744333 1 002773 P01/7700 0.00-0227514.7
3. Full name, address and postcode of the or of each applicant (underline all surnames)	Flow Systems Design Limited Bamcroft Vicarage Lane Dore Sheffield S17 3GX	0851442400
Patents ADP number (if you know it)		
If the applicant is a corporate body, give the country/state of its incorporation	United Kingdom	
4. Title of the invention	Display Fountain, System, Array and Wind Detector	
5. Name of your agent (if you have one)	Mark G F Lunt	
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Harrison Goddard Foote Fountain Precinct, Leopold Street Sheffield S1 2QD	
Patents ADP number (if you know it)	7914237001	
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)
		Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See notes (d))		

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

34

Claim(s)

9

Abstract

1

Drawing(s)

17

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 8/77)

3

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

26 November 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Mark G F Lunt

0114 274 3701

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

Display Fountain, System, Array and Wind Detector

The present invention relates to fountains,
particularly display fountains, although the invention in
5 its different aspects may also have other applications.

Display fountains come in many shapes and sizes.
Water "features" are a common and increasingly popular
aspect of domestic garden scenery. Larger displays are
frequently employed in public places and have long been
10 an adjunct to architectural or sculptural works. Most
fountains are static, in that they have a single mode of
operation - they are either on, or off. Static fountains
are the simplest and least expensive, and generally only
require a pump or water supply to operate. These kinds
15 are affordable by most people and are seen in many garden
ponds. Various nozzles provide different effects from
sprays to jets, and may be arranged to entrain air so
that a foaming spray is generated.

However, more sophisticated fountains are dynamic in
20 that their operation is controlled, and accordingly
varied, by different jets being switched on or off, or
having their pressures varied, or redirected. The
control arrangement is invariably electronic with greater
or lesser complication, and involves the use of
25 selectively operable mechanical valves that can interrupt
flow, as may be desired. By this means a wide variety of
different effects can be achieved. But such variety
comes at a significant cost, not just in terms of price,
but also of reliability. Fountains generally involve
30 recycling pond or fountain pool water, and debris
eventually builds up and can block valves etc.

One recent development in fountain displays is the use of slugs of water. Although a continuous jet of water involves continuous motion, this fact disguised by a complete arc of a water jet, which can appear somewhat static. If, however, slugs of water are generated, which
5 slugs have a beginning and an end, the motion is brought home to the viewer. US-A-5979791 and US-A-6119955 both disclose arrangements for producing slug jets, one involving the use of a syringe-type of arrangement, and
10 the other involving a plug rapidly releasing and closing an orifice of a chamber containing liquid under pressure.

US-A-5918809 discloses a water display arrangement in which a float is provided with nozzles supplied by flexible water pipes, the reaction from the nozzles
15 moving the float about on a pond or pool surface and creating interesting effects. However, mechanical switching arrangements are provided.

Numerous patents disclose fluidic arrangements for producing oscillating jets, whose main application
20 appears to be in the automotive field for vehicle windscreen and headlight washing. Examples are to be found in US-A-6253782, US-A-5213269, US-A-5181660, EP-A-0208174 US-A-4398664, US-A-452867 and WO-A-7900361.

EP-A-0331343 discloses the use of a fluidic bistable
25 oscillator in the production of a spray of droplets having a narrow size spectrum. SU-A-478622 discloses a display fountain using a diverter to provide alternating jets under pneumatic control.

It is an object of the present invention to provide
30 a display fountain that has opportunities for a variety of functions without the necessity of moving valves, pistons or the like mechanical components.

In accordance with a first aspect of the present invention there is provided a fountain comprising:

a supply of water under pressure;

a primary fluidic diverter having an input for said
5 supply, and first and second outputs diverging from said
input, two control ports provided with control flow to
direct input flow to one or other of said outputs; and

a vortex amplifier comprising a vortex chamber, a
radial port, a vortex inducing port and an axial port;
10 wherein one of said first and second primary diverter
outputs is connected to said vortex inducing port and the
other is connected to said radial port, said axial port
leading to a nozzle whereby an alternating vortex spray
or axial jet is produced. Accordingly, when the diverter
15 switches flow to the vortex inducing port of the vortex
amplifier, a vortex is induced in the vortex chamber so
that flow issuing from the nozzle swirls and forms a
conical spray. However, when the diverter switches flow
to the radial port of the vortex amplifier, no vortex
20 forms in the vortex chamber, the flow therein being only
radial, whereby a non-swirling axial and coherent jet
issues from the nozzle.

Preferably, said control ports are interconnected by
an inertia loop, whereby oscillations are induced in the
25 control flow to switch flow alternately between said
first and second outputs.

Alternatively, said outputs may have restrictors
therein and include feed back loops into said control
ports, whereby oscillations are induced in the control
30 flow to switch flow alternately between said first and
second outputs.

Said first and second outputs of either diverter may be vented to isolate each input from the outputs, and the outputs from one another, although not, of course, where feedback loops as mentioned above are employed.

5 Any of said diverters may be cusped between said first and second outputs to increase stability of flow through said first and second outputs.

Preferably, said vortex amplifier comprises an annular chamber formed by a tubular housing and central
10 body, supply flow to the amplifier entering said annular chamber at one end, the other end of the annular chamber being terminated by a nozzle plate defining with said central body said vortex chamber, said housing having an opening forming said vortex inducing port.

15 Said vortex inducing port is preferably a passage from a supply chamber outside said housing and arranged tangentially with respect to said vortex chamber. Alternatively, said vortex inducing port comprises a plurality of said openings in said housing, each opening
20 provided with a vane to tangentially direct radial inflow from a supply chamber surrounding said housing.

Preferably, said nozzle is interchangeable with different nozzles displaying one of various spray patterns when vortex spray issues therefrom.

25 A spray catcher may be disposed beyond the nozzle to deflect vortex spray issuing from said nozzle, the catcher having an orifice to permit passage of said axial jet to flow unimpeded. Indeed, the catcher may be formed as an inverted cup, so as to destroy entirely said vortex
30 spray, although still permitting the jet flow.

Two vortex amplifiers may be provided in parallel, each with its own supply to its radial port, each vortex inducing port being connected to one or other of said first and second outputs of the primary diverter.

5 Indeed, such an arrangement may also be provided as a component of a fluidic control arrangement in a fountain system wherein, instead of said axial outputs of the two vortex amplifiers leading to nozzles, they lead to further components of the system, and which are
10 arranged to be controlled by greater or lesser flow rates from the vortex amplifiers that issue from said axial output depending on whether there is flow into said vortex inducing port.

Alternatively, or in addition a fountain system may
15 include two primary diverters whose first outputs are joined together and comprise the radial input for said vortex amplifier, and whose second outputs are connected to separate vortex-inducing ports of said vortex amplifier, whereby several modes of operation of the
20 vortex amplifier results. To achieve variety in the display, the diverters are preferably arranged deliver flow at different strengths, either by being different in size or of supplied pressure and/or flow. The diverters could be designated "strong" and "weak". For example,
25 when the vortex inducing ports are arranged to induce a vortex in the same direction with respect to one another, then column A in the following table shows the resulting flow states in the axial outlet of the vortex amplifier. The first two columns indicate the direction in which the
30 diverters are switched (to first or second outputs). Four possible circuit states are produced, ranging from one (first row) with zero swirl (and a strong coherent jet) to one with maximum swirl (fourth row, with both

diverters inducing vortex flow). The others have intermediate swirl strengths (partial swirls 1 and 2 being different) giving a total of four possible water jet or spray effects.

5 Alternatively, if the vortex inducing ports are arranged to oppose one another, then the four possible flow states are as tabulated in column B. They range between zero swirl (row 1) and a high swirl state (rows 2 or 3 depending on the relative strengths of the diverter
10 flows). This high swirl state has less swirl intensity than that of column A. The fourth row, corresponding to both diverters attempting to induce vortex flow in opposite directions produces another intermediate swirl state. Consequently this "contra-swirl" configuration
15 produces a finer gradation of swirl intensity than that with co-directional vortex inducing ports. Small degrees of swirl cause great degrees of effect in the jet efflux. The relative swirl strengths of the partial swirl states depend on the relative strengths of the two diverters but
20 this relativity or ranking is unimportant. The significant attribute is the ability to produce four distinct display phenomena.

Diverter 1, Output in flow	Diverter 2, Output in flow	A Axial output from Vortex amplifier	B Axial output from Vortex amplifier
First	First	Non-swirl flow	Non-swirl flow
Second	First	Partial swirl 1	Partial swirl 1
First	Second	Partial swirl 2	Partial swirl 2
Second	Second	Maximum swirl	Partial swirl 3

Table I

If the diverters are themselves controlled to switch at different times, the period of each phase can vary and appear somewhat random. This can be achieved, for example, by a control loop for each diverter having a
5 different length, given that it is primarily the length of such loop that controls oscillation period.

A novel form of self oscillating vortex nozzle having potential application in a fountain system according to the first aspect of the present invention
10 comprises a cylindrical vortex chamber having a central output nozzle and an input comprising a section of the cylindrical wall of the chamber to which an input chamber is connected, a narrowing of the input chamber being provided at the input section of the vortex chamber,
15 whereby flow entering the vortex chamber oscillates between swirling entry and straight radial entry leading to oscillations in the out put between a straight jet and a swirling spray.

Windy conditions adversely affect the appearance of
20 fountains, and frequently causes loss of water from a surrounding pool, which might be problematic in respect both of the loss of water from the pond or pool, as well as wetting surrounding areas.

Consequently, in its first aspect, the invention
25 also provides a wind detection and adjustment device comprising a catcher for water issuing from a detecting jet and falling under no-wind conditions, and a wind control diverter having a supply input, first and second wind control outputs diverging from said supply input,
30 two wind control ports to direct supply input flow to one or other of said outputs, wherein water caught by the catcher is supplied to one control port to direct supply

input flow to said first wind control output, the other control port being supplied from a feedback loop from said first wind control output that switches supply input flow to said second wind control output when no water
5 flows from said catcher.

Preferably, said first wind control output is connected to the radial port of a fountain supply vortex amplifier to provide a strong flow therethrough, and said second wind control output is connected to a tangential
10 port of a vortex amplifier to provide a weak flow therethrough, output from the fountain supply vortex amplifier supplying the fountain display.

Indeed, from a second aspect, the present invention provides a wind detection device comprising a catcher for
15 liquid issuing from a detecting jet and falling under no-wind conditions, an outflow from the catcher, and means to detect liquid in the catcher.

Said means to detect may comprise a pressure sensor sensitive to hydrostatic pressure of liquid in the
20 catcher. Alternatively, said means to detect may comprise a flow detector sensitive to outflow of liquid from the catcher.

Inherent in such a detection device is that, in high-wind conditions less liquid falls into the catcher,
25 so the outflow from it, or the hydrostatic pressure in it, is less than in no-wind conditions. Ultimately, in high-wind conditions, outflow from the catcher leads to both the hydrostatic pressure and outflow reducing to zero. Whether this occurs very rapidly, so that the
30 detector is sensitive to gusts, or slowly, so that the detector is sensitive only to sustained high-wind, is a matter of design choice. Indeed, there is no reason why

the pressure or outflow detectors should not be sensitive enough to detect gradations of wind.

The wind detector is most suitable where there is already a source of liquid under pressure, such as in fountain displays. In this event, and others, the liquid is preferably water. The detecting jet is preferably vertical, although it may be pointed in any direction provided the catcher is positioned to receive the detecting jet in no-wind conditions. The jet may be vertically down. The wind detector may be employed with a fountain display according to the first aspect of the present invention, but equally it could be employed with more conventional display fountains employing electrical/mechanical controls. Thus the flow/pressure detectors may be non-fluidic.

Preferably, manual control of a fountain display in accordance with the first aspect of the present invention is provided, comprising a manual diverter having a manual input, first and second manual outputs diverging from said manual input, first and second manual control ports to direct said input flow to one or other of said outputs, wherein each control port is supplied by a branch from said manual supply, each branch being controlled by a first restrictor and at least the first control port branch having a second restrictor, a selectively blockable vent being provided between said first and second restrictor whereby, when said vent is blocked, said restrictors are such that control flow is primarily through said first manual control port and, when said vent is not blocked, control flow is primarily through said second port.

Both branches may have a second restrictor, and both having a selectively blockable vent between said first and second restrictors in each case.

A pilot diverter may be provided, comprising a pilot
5 flow input, first and second pilot outputs diverging from said pilot input, two pilot control ports provided with control flow to direct pilot input flow to one or other of said pilot outputs, which pilot outputs comprise the control ports of said primary diverter.

10 Multiple logic diverters may be connected in a logic circuit wherein each diverter has a logic flow input, first and second logic outputs diverging from said logic input, two logic control ports provided with control flow to direct logic input flow to one or other of said logic
15 outputs, which logic outputs comprise the control ports of any other logic diverter, any pilot diverter or said primary diverter.

Said pilot diverter may be in the form of a logic module receiving a plurality of inputs from different
20 sources whereby the direction of switching of said primary diverter may be dependent on a plurality of factors controlled by said logic module.

A fountain display in accordance with the first aspect of the present invention may comprise a plurality
25 of diverters, some providing alternating jets directly, and others feeding vortex amplifiers providing alternating jets and sprays, each diverter being controlled by said logic module having a number of
inputs, one of said inputs being connected to one output
30 of a neighbouring diverter, and another of said inputs being connected to the other output of said neighbouring

diverter or to one output of a different neighbouring diverter.

A neighbouring diverter for a diverter on one side of the fountain display may comprise a diverter on the
5 opposite side of the display, whereby the display is topologically on the surface of a sphere.

Said diverters may be arranged in a square formation and each diverter may have eight neighbours, said logic module having four inputs on one side and four on the
10 other.

However, in a third aspect of the present invention, there is provided a fountain display, comprising at least two display elements, each element being driven by at least one output of a diverter directly associated with
15 each element and controlled by a logic module, each diverter comprising an input for a supply of liquid, and first and second outputs diverging from said input, and at least one control port selectively provided with control flow to direct input flow to one or other of said
20 outputs, and each logic module having at least two inputs and at least one output connected to the control port of the diverter to provide said control port with said selective control flow, and wherein at least one output of the diverter of one element is connected to one input
25 of the logic module of another element.

Preferably, each element has two modes of operation, one mode driven by one output of said associated diverter and the other mode being driven by the other output of said associated diverter, said connection to said input
30 of the logic module of said another element being a branch of one of said outputs of said associated diverter.

Said logic module may comprise multiple logic diverters in a logic circuit, wherein each logic diverter has a logic flow input, first and second logic outputs diverging from said logic input, two logic control ports provided with control flow to direct logic input flow to one or other of said logic outputs, which logic outputs supplies the control ports of any other logic diverter, or the, or one, output of the logic module.

The display elements may be in a formation in which each element is surrounded by N neighbouring ones of said elements and in which each logic module has N inputs, one from said branch of each neighbour. The formation might be square, and N might be eight. Indeed, the number N of neighbours and inputs may be the same for each element, the display being arranged as a topological sphere.

In one embodiment, the display arranged to emulate a cellular automaton demonstrating the "Life" process of J H Conway. In another, it is arranged to emulate a cellular automaton demonstrating the "rule 30" algorithm of S Wolfram.

Embodiments of the invention are further described hereinafter, by way of example, with reference to the accompanying drawings, in which:-

Figures 1a to f are schematic illustrations of diverters useful in the practice of the present invention;

Figures 2a to d are a schematic illustration of a diverter controlled by a pilot diverter, its symbolic representation, a circuit involving two such diverters, and a multi-stage register, respectively;

Figures 3a to d are a side section, section on the line 1-1 in Figure 3a, section on the line 2-2 in Figure

3a, and a perspective view of a vortex valve useful in the performance of the present invention;

Figures 4a,b and c are side sections through nozzle arrangements useful with the vortex valve in Figure 3;

5 Figures 5a,b and c are side views of adaptations of the nozzles in Figure 4 and provided with swirl catchers.

Figures 6a to g are side section and perspective views of different nozzle arrangements;

10 Figures 7a to d show variations of the vortex valve of figure 3, in side section, cross section, modified, partial cross section and modified cross section, respectively;

15 Figures 8a,b and c show side section through a diverter of Figure 1 (in fact Figure 1a) combined with the vortex valve of Figure 3 (a fountain element in accordance with the present invention), in section in Figure 8a, in perspective view in Figure 8b and symbolically in Figure 8c;

20 Figures 9a to 9c show various ways of employing the arrangements of Figure 8, but as a control valve rather than a direct fountain spray element;

Figures 9d to 9g show how various spray effects are achieved from arrangements of diverters and vortex valves;

25 Figure 10 is a section through a self oscillating nozzle, useful in some embodiments of the present invention;

30 Figure 11 is a schematic illustration showing a wind detection and adjustment system, useful in a fountain system in accordance with the present invention;

Figure 12 is a schematic circuit diagram showing a manual control arrangement;

Figure 13 is plan view of a fountain system in accordance with the present invention employing some of the arrangements illustrated in Figures 1 to 12;

Figure 14a to c show further circuit control elements useful in fountain systems according to the present invention;

Figure 15 is a plan view schematically illustrating a fountain system in accordance with a further embodiment of the present invention;

Figure 16 is a detail of part of the system of Figure 15;

Figure 17 is a possible fluidic circuit arrangement to give effect to the logic module shown in Figure 16; and

Figure 18 is a diagram of a simpler logic circuit for a module receiving inputs from just two neighbours.

Figure 1a shows an unvented bistable fluid amplifier (fluidic diverter 10), comprising a supply input 12, two control ports 14a,b, and two outputs 16a,b. The supply flow is formed into a jet 17, which attaches to either the top or the bottom of a diverging section 18 of the diverter 10. Accordingly, the supply flow through the jet 17 will exit one or other of the outputs 16a,b. All of the supply flow can be switched to either output (100% diversion) if brief control flows are imposed on the control ports 14a,b. If the outputs are unrestricted, flow can be entrained from the inactive output, so that the outflow appears to be greater than the supply flow ("more than 100% flow diversion"). The control flow needed to switch the diverter 10 depends on the output restriction. Increasing restriction (thereby reducing the percentage flow diversion) reduces the flow needed to

switch the diverter (that is to say, the restriction increases the "gain", but reduces the "stability").

In Figure 1b, vents 20a,b are shown in modified diverter 10a. The vents 20a decouple the outputs 16a,b, from one another so that there is no flow entrainment. Moreover, the amplifier 10a acts as a logic element (flip-flop or memory device). It can be connected easily to other similar elements to transmit signals, because the vents 20a,b isolate operation of each device in the overall circuit.

Figure 1c shows the symbol employed herein in circuit arrangements. The reference numerals are the same as those employed in Figures 1a. Indeed, the same reference numerals are applied throughout this specification to refer to essentially the same components, sometimes modified with subscripts or superscripts to indicate modifications or different examples of the same unit.

Figure 1d shows a further diverter 10b, having a cusped splitter 22 between the two outputs 16a,b. The twin cusps 22 promote a re-circulation zone and provide a highly stable flow field. This is because, even should the active outlet 16a or b be blocked, a re-circulating flow can remain attached to the adjacent side wall of the diverging section 18. When the block is removed, flow continues down the same branch.

GB-A-1297154 and 1363762 both disclose the use of a fluidic diverter to provide oscillating flow. This is done by interconnecting the control ports of the diverter, as illustrated in Figure 1e, where the control ports 20a,b are interconnected by a hose 24. The diverter must be suitably designed (ie not a high

stability type) and the outputs must be restricted, as shown at 16'a,b). Sufficient restriction should be made of the outputs 16'a,b to ensure 100% flow diversion. The frequency of oscillation is determined by the inertia of the flow through the control loop 24, and the pressure difference induced between the control ports by the main flow jet 17. Increasing flow increases the pressure differential and the result is that frequency is closely proportional to the flow. Importantly, the time constant can be set by inertia and resistance (without the need for compliance - ie elasticity). Consequently, an incompressible fluid, such as water, can fill the control loop 24 and produce a reliable dynamic response. In general, the longer the control loop 24 is, the lower the frequency of oscillation will be. On the other hand, the control loop 24 cannot be so long that its resistance prevents the necessary flow to build-up and switch the diverter 10c.

It is important to expel all air in the control loop 24, and one way of doing this is to provide a bleed tap (not shown) near the middle of the control loop 24. This works provided that the pressure in the control loop is greater than atmospheric. If the pressure is lower, then a small water feed into the control loop to purge the loop of air may be required.

Figure 1f shows a diverter 10d in which restricted outputs 16'a,b are provided with branches 26a,b that are fed back into the control ports 14a,b. The restrictions of the outputs ensure a strong feedback signal. These set the frequency by way of a predominantly inertial time constant (like the control loop 24 mentioned above). However, if compliance is introduced into the feedback path, this influences the time constant. Indeed,

increasing elasticity (or increasing inertance) decreases the frequency. If elasticity is minimized, the inertial time constant is dominant and, like the control loop oscillator 10c, the frequency is closely proportional to
5 the flow.

In Figure 2a, a two stage fluidic bistable amplifier 30 is shown. Here, a first diverter 10 corresponds with any of the diverters discussed above with reference to Figures 1a to f. However, its outputs 16a,b form the
10 control ports 14'a,b of a second diverter 10e. This is shown in symbol form in Figure 2b. Such an arrangement can provide both pressure and flow gain. Typically, diverter 10e is bigger than diverter 10, especially if the diverters are unvented devices.

15 Various logical functions can be produced by simple chains of bistable amplifiers. Four amplifiers can be used as two stages of a shift register. See, for example, Figure 2c. Here, two-stage amplifiers 30a,b are connected in series, each serving as memory elements
20 containing one bit of information each. Amplifiers 10₁ and 10₂ are memory elements containing one bit of information each, whereas amplifiers 10₂ and 10₄ act as control gates. If the supply flow to the control gate is zero, there is no transmission of the state of amplifier
25 10₁ to amplifier 10₃. However, when a "shift signal" is fed to gates 10₂ or 4 the state of flow through the preceding amplifier 10₁ or 3 is transmitted to the next element in turn (ie diverter 10₃ or beyond diverter 10₄).

Thus, if the supply flow to diverter 10₁ is presently
30 directed to the upper output (ie in the direction of the arrow A) then, when a shift signal is sent to supply 12₂ of diverter 10₂, its output will be switched by the A

output of diverter 10_1 . It will be switched into an output in the direction of the arrow B from diverter 10_1 . This will serve in turn to switch the supply entering diverter 10_2 from its input 12_1 to the direction C, which
5 it will then maintain even if the shift signal 12_1 into diverter 10_2 should subsequently cease. Likewise, the preceding state of diverter 10_1 would be passed on to subsequent elements of the logic circuit by the diverter 10_4 .

10 In a chain of more than two or three amplifiers, the flow gain may be substantial. In that event, some of the amplifiers would typically be vented devices.

Such chains of amplifiers can be controlled in various ways. For example, the gating signals to the
15 control amplifiers 10_2 , 10_4 can be activated in anti-phase (ie one on and the other off) thereby giving very tight control of the progress of signals through the chain. The same surety can also be achieved by restricting the signal strength transmitted from the memory amplifiers
20 10_1 , 10_3 . Signals can only transmit when the gate amplifiers accept the weak signal, and then boost it to control the next amplifier. This onward transmission only occurs when the gate amplifiers have a high supply flow, but they are then immune from the weak signals
25 coming from the preceding memory amplifiers. Hence a shift register can be made using two amplifiers per stage.

..... Various sequences of signals can be generated by feeding back signals from the output to the input of a
30 shift register. By feeding back simple logic functions (for example exclusive-or) so called maximum length sequences can be generated (meaning the maximum possible

length of bit sequence before repetition from the given number of memory elements in the shift register). Hence, complicated sequences of events can be controlled.

Figure 2d shows a multi-stage fluidic shift register 30'.

5 Turning to Figures 3a to d, a vortex valve 40 is shown having a supply flow input 42 and a control flow input 43. The input 42 is received in a housing 44, it being sealed thereto by an end cap 46. Inside the housing 44, the supply input is perforated with regularly
10 spaced holes 48 (spaced both axially and circumferentially) so that the flow enters an annular duct 50 formed between the input pipe 42 and the housing 44. The input pipe 42 is sealed at its end by a centre body 52 that defines one side of a vortex chamber 54. The
15 other end of the vortex chamber is closed by a nozzle plate 56 having a central nozzle 58.

The control flow input pipe 43 is connected to the nozzle plate 56 and is terminated by a tangential port 60 that connects the pipe 43 with the vortex chamber 54.

20 In the absence flow in the control pipe 43, flow in the pipe 42 exits through the holes 48 and flows along the annular duct 50 and enters the vortex chamber 52 in a radial direction from around the entire circumference of the centre body 52. Accordingly, there is no
25 circumferential component of the flow. It is entirely radial, as shown by the arrows in Figures 3a and c. Accordingly, the output from nozzle 58 may be a coherent, non-swirling jet that will exit the nozzle 58 as a clean column of liquid, with no spray or break-up.

30 However, if there is no supply flow 42, but only flow in the control pipe 43, then the vortex chamber 54 is filled by supply through the tangential port 60. So

that there is a swirling flow in the vortex chamber 54 as shown by the arrows in Figure 3b. In this event, the flow out of the nozzle 58 has substantial swirl and exits nozzle 58 as a coned spray. The cone angle is dependent
5 on the geometry of the nozzle and the degree of swirl in the vortex chamber 54.

Accordingly, depending on whether flow to the vortex valve 40 is through the supply input 42 or the control input 43, the exit from the nozzle 58 is either as a
10 coherent jet or as a fine coned spray.

Referring to Figures 8a to c, the vortex valve 40 is shown there used in conjunction with a diverter 10 to form a basic fountain 50 in accordance with the present invention. In its simplest form, the fountain 50
15 comprises a diverter 10 as described above with reference to Figure 1e. That is to say, one in which the control inputs 20a,b are interconnected by a control loop (not shown in Figure 8a). In this event, the flows to the respective outputs 16'a,b simply oscillate, so that flows
20 to the inputs 42,43 of the vortex valve 40 alternate with respect to one another. Thus, the output from the outlet nozzle 58 oscillates between a straight jet and a coned spray.

In Figure 8b, it can be seen that diverter 10 has a
25 rectilinear cross-section. This favours effective switching between the respective outputs, both by virtue of the control inputs 20 being across the entire section of the supply 12, as well as the jet flow having greater surface of the diverging walls 18 over which to attach
30 thereto. However, in a practical embodiment, there is likely to be a smooth transition between the round supply, control and delivery tubes connected to the

diverter 10, and the rectilinear sections of the diverter itself. The symbol for the switched vortex valve 50 is shown in Figure 8c.

Returning to Figures 4a to c, a nozzle plate 56a is shown in Figure 4a. A nozzle body 57 can be screwed into a threaded aperture 55 of the nozzle plate 56a. The nozzle body 47 has the nozzle aperture 58 and this can be shaped to provide the desired jet. Where the two forms of jet are a swirling conical flow sheet, or a coherent jet, these are most readily accommodated by a smoothly chamfered inlet 59 of the nozzle 58 and a sharp exit 61. In Figure 4b and c, a nozzle body 57' is here held in place by a threaded retaining ring 63 screwed onto a modified nozzle plate 56b, which is provided with an O ring seal 67.

Turning to Figure 5a, one embodiment of retaining ring 63' is shown having a pin 69 projecting therefrom and to which a swirl deflector disc 71 is connectible. Disc 71 is provided with a central aperture 73 through which jet flow from nozzle 58 can pass unimpeded. However, when a diverging coned sheet flow (suggested by arrow 75 in the drawings) emanates from the nozzle 58, it is deflected by the disc 71 and evolves more as a horizontal spray, even more distinct from the jet than the coned spray. Alternatively, an entirely spray destructive shroud 71' can be connected to the pin 69. The shroud 71 entirely contains and destroys the conical spray 75 so that the output from the nozzle 58 appears only to comprise a pulsating jet. If that is very coherent, its appearance is very appealing, emphasizing the motion of the water in an arcing flow.

Figure 5c shows how the disc catcher 71 may be implemented with a screw in nozzle 57'. Here, a disc 72 is formed integrally with the nozzle body 57' and to which the pin 69 is connected. To the pin 69, deflector disc 71 or shroud 71' can be connected as desired.

Referring to Figure 6, various forms of nozzle plates 57' are shown.

Figure 6a shows a basic nozzle 58 that gives a conical spray and a good coherent jet. In Figure 6b, nozzle 58b has a chamfered exit so that a flat or very wide spray is delivered. However, it is more difficult for the jet to remain coherent, so that any swirl is more likely with this arrangement to lead to break-up of the jet. In Figure 6c, the nozzle 58c is in the form of a flat slit across the face of the nozzle plate 57'. This results in a flat, triangular sheet-jet. In Figure 6d, a stepped bore nozzle 58d provides a very tight spray and a good jet. Figure 6e shows a multi-jet nozzle 58e. Figures 6f and g show a modified nozzle plate 57' that is provided with a threaded bore 55' to receive screw-in nozzle bodies 58 similar to those described above with reference to Figure 4a.

Turning to Figure 7a to d, a modified vortex valve 40' is shown in which the control pipe 43' now surrounds the housing 44 and has a number of tangential control ports 60'. However, to direct the flow tangentially, the wall of the housing 44 has to have a substantial thickness, so that a tangential flow direction can be provided by the ports 60'. Alternatively, vanes 75 may be disposed across the wall 44, so that flow from the annular control duct 43' into the vortex chamber 54 is caused to swirl by those vanes 75 on passing through the

openings 60'. Also, as shown in Figure 7c, straightening vanes 77 can be provided on the centre body 52 so that flow through the supply pipe 42 can be maintained absolutely axial.

5 Referring to Figures 9a to g, various combinations of the foregoing components are illustrated. In Figure 9a, the switched vortex valve 50' is shown delivering an output outflow on line 76 that is led to another device or system. The effect of the diverter 10/vortex valve
10 40' combination is that the supply flow 12 is modulated at the output 76 by the control flows 20. When the vortex valve 40' is supplied by output 16b of the diverter 10, then no vortex swirl is produced in the vortex chamber 54 of the vortex valve 40'. Therefore, a
15 high flow rate is seen at the output 76. On the other hand, if the output of the diverter 10 is through line 16a, then this enters the vortex valve 40' tangentially. This causes a vortex in the chamber 54 and so increases the resistance of the valve to flow. A relatively small
20 output flow is then seen at the outlet 76.

In Figure 9b, a diverter 10 is shown with its outputs 16a,b connected to two vortex valves 40a,b. Each vortex valve has its own radial supply 42a,b so that, depending on the switched state of diverter 10, vortex
25 valves 40a,b will alternate between respective jet flow and spray flow. In Figure 9c, the arrangement is as in Figure 9b except that the vortex valve 40'a,b are as shown in Figure 9a, and are used to provide flow for another device or system from their outputs 76a,b.

30 In Figure 9d, two diverters 10a,b are used to control a single vortex valve 40" having opposed control flow inputs 43a,b. This provides for potential modes of

operation depending on the four possible combinations of the outputs from diverters 10a,b. Indeed, the four output states of the flow from nozzle 58 are described in the Table I above for amplifier B.

5 In Figure 9e, a variation is shown in which the control nozzles 43a, 43'b of vortex valve 40'' are in the same direction. Table I above describes the outflow through the nozzle 58 of the vortex valve 40'' (amplifier A), depending on the states of outputs of the diverters
10 10a,b.

Figure 9f shows the symbolic representation of the arrangement described with reference to Figure 1e above in which a control loop 24 is employed to provide oscillatory flow at the control inputs 20a,b of diverter
15 10. Indeed, the arrangement shown in Figure 9g is perhaps the simplest embodiment of fountain in accordance with the present invention, in which the input supply 12 is connected to a source of water under pressure (eg mains supply) and the output from the nozzle 58 is either
20 a spray or a single jet. Such an arrangement is simple and inexpensive to manufacture and yet provides an alternating display not presently available so simply.

Figure 9g shows an arrangement as described above with reference to Figure 9e, but where control loops
25 24a,b for the two diverters 10a,b are provided, each of different length. Each diverter switches with a different frequency, therefore, and this results in a somewhat random, or cyclic, appearance to the four output states from the nozzle 58 of the vortex valve 40''.

30 Figure 10 illustrates a self-oscillating vortex nozzle 80 comprising flat top and bottom walls 82, a circular vortex chamber 84 and an input chamber 86. The

input chamber 86 has a supply port 88 in the wall 82 and the vortex chamber 84 has a central outlet nozzle 90 disposed in the wall 82 that is opposite the wall containing supply port 88. A waist 92 defines the interface between the inlet chamber 86 and the vortex chamber 82. It is found that, in operation, flow into the inlet chamber 86 transitions into the vortex chamber 84 and oscillates between direct flow (that issues from the nozzle 90 as a jet), and swirling flow (resulting in a spray issuing from the nozzle 90). The swirling flow is first clockwise, then anti-clock wise and switches back and forth.

Referring now to Figure 11, a wind detection system 100 comprises a vertical nozzle and water jet 102 and a surrounding catcher basin 104. The diameter of the basin 104 is designed to be so small that only wind of less velocity than a certain, predetermined velocity will permit the water issuing from the nozzle 102 to be caught by the basin. Wind of any greater velocity will deflect the jet so that it falls beyond the edge of the basin 104. The catcher 104 feeds a vertical columnar collector 106. The wind state is detected by a fluid amplifier 10₁ having a small supply flow 12₁. Control input 20a of the amplifier 10₁ is provided by the collector 106. At low wind speed, the control signal here is strong, and the amplifier is switched to output 16b. Control input 20b is supplied by a feedback bias from output 16b, but the feedback flow is insufficient to overcome the control flow from the wind detector during low wind conditions. However, should a high wind develop so that the catcher 104 empties and no flow comes from the collector 106, the feedback bias from output 16b is sufficient to switch diverter 10₁. Its output then appears on output 16a. The

outputs from diverter 10₁ are further amplified by a second bistable amplifier 10₂. More stages could be added to provide control signals to the water supply system, for example, to the fountain system.

5 With reference to Figure 12, a manual control system is provided by a diverter amplifier 10 provided with a supply 12 that has two branches 13a,b that supply control inputs 20a,b of the diverter 10. Both branches 13a,b are controlled by restrictors R₁, R₂. However branch 13a is
10 provided with a further restrictor R₃, and, between restrictors R₁ and R₃, a selectively blockable vent V is provided. Under normal, unblocked conditions, restrictor R₃ and vent V conspire to ensure that substantially no flow is provided at control 20a. In that event, diverter
15 10 is switched by the flow through restrictor R₂ and control port 20b so that its supply 12 exits on output 16a. However, restrictors R₁ to R₃ are arranged so that, should vent V be selectively blocked, a more powerful flow is provided by control port 20a, so that diverter 10
20 is switched to output 16b. Indeed, in this respect, branch 13b provides a reset signal in the absence of activation of branch 13a by blocking vent V. However, an alternative arrangement would be to duplicate branch 13a in branch 13b, whereupon a bistable arrangement would be
25 provided capable of being switched by blocking either of the vents.

Figure 13 discloses a fountain system 110 embodying the present invention and employing some of the components described above. Here, a main pump 112
30 supplies water under high pressure. The output 114 immediately branches into a high pressure branch 116 and a branch leading to a jet pump 118 that entrains flow from a source 120 to provide a high flow branch 122. The

high flow branch supplies two vortex valves 40a,b in an arrangement as described above with reference to Figure 9b. The vortex valves are controlled by a diverter 10 which is operated in a mono-stable mode under the control
5 of a wind detector 100, and substantially as described above with reference to Figure 11. The only modification is that the bias is provided by a branch of the high pressure supply 116. A signal amplifier 124 outputs the signal from the wind detector 100 to the diverter 10.

10 The arrangement is such that, in low wind conditions, vortex valve 40b is set to high resistance so that the high flow supply in line 122 is impeded and results in a low flow supply in output 126. However, radial flow is permitted through vortex amplifier 40a, so
15 its output 128 is in high flow during low wind conditions.

Output 126 supplies a ring 125 of three fountain devices 50a,b,c and a central fountain 50d, all of which are substantially as described above with reference to
20 Figure 8. Whereas fountain 50d may be under automatic control by a closed loop, for example (as described above with reference to Figure 9f) high pressure line 116 may also supply a manual control device 130 (operating substantially as described above with reference to Figure
25 12). This is arranged to control the ring of fountains 50a,b,c.

On the other hand, output 128 from the vortex valve 40a supplies two outer rings 127 of devices, an inner ring 129 of oscillating valves 80 (substantially as
30 described above with reference to Figure 10) and an outer ring 131 of diverter fountains 10'. Here, the diverter outputs 10' are themselves provided with nozzles to

deliver alternating jets of water. Again, the high pressure supply 116 is fed to a signal generator 30", which controls the sequencing of the diverter jets 10'. The signal generator 30'' may be a sequence generator
5 controlling all the diverters 10' so that they switch in sequence to produce a "Mexican wave". Alternatively they may be switched in phase.

Turning to Figure 14, the diverters 10' of the ring 131 in the fountain system 110 of Figure 13, may include
10 an integrated, small pilot amplifier 10". This would enable small signal flows sent from the central control unit 30" to switch the diverters 10'.

Using the concept of piloted fluidic display devices, the control sequences could conceivably be
15 implemented by the display devices themselves, if suitable interconnections were made. For example, with an array of N diverters and switched vortex valves, correct interconnection feedback would enable the array to go through a sequence of 2^N different combinations of
20 right/left events (diverter fountains 10'), or spray/jet events (diverter vortex amplifier combinations 50) before repetition. In effect, the individual display devices (albeit supported by their pilot stage) would constitute elements of the shift register sequence such as described
25 above with reference to Figures 2c and 2d.

A further advance is shown in Figure 14b and c, which would be to attach a logic module 132 to a diverter 10. In Figure 14b, the diverter 10 comprises the fountain element itself. On the other hand, in Figure
30 14c, the diverter is part of a switched vortex valve 50. In either event, the logic module has its own supply 134 that appears at one of its outputs 136 forming the

control inputs of the diverter 10. Multiple inputs from other sources can be integrated to provide an output on either line 136 depending on which inputs are active.

With an arrangement such as this, an array 150 of fountain devices can be internally controlled. In Figure 15, a central array of switched vortex valves 50 are shown with a surrounding array of diverters 10. Each device is connected by input and output signals to the surrounding eight devices. At the edges of the display 150, signals from one side are transmitted to the opposite edge, so that a topological sphere is provided.

Turning to Figure 16, a single fountain element 10/50 is illustrated having eight surrounding elements 1 to 8. Each of the surrounding elements has a diverter output A or B. The A branches of surrounding fountain elements 1, 6, 7 and 8 are connected to inputs 1, 6, 7 and 8 respectively of logic controller 132 of the device 10/50. The remaining surrounding devices 2, 3, 4 and 5 have their B outputs connected to inputs 2 to 5 of logic controller 132. How logic controller 132 is configured is a matter for discretion and design choice, but one possible switching regime is illustrated in Table II below.

Number of Active Inputs	Current State	Consequent Next Output State
1,2,4,5,6,7 or 8	Left	Stay Left
1,4,5,6,7 or 8	Right	Switched Left
3	Left	Switched Right
2 or 3	Right	Stay Right

Table II

In any event, depending on the logic mode chosen, the output of device 10/50 is to one of its two outputs 136, that is to say, A or B. It is to be noted that the outputs A,B of the device 10/50 each have four branches
5 leading to one each of four of the eight surrounding devices 1 to 8, providing inputs to their logic modules 132₁ to 132₈.

When connected in this way, the array emulates a classic cellular automaton ("Life", created by John
10 Horton Conway). As a result, the fountain display 150 could replay any of the well established complex (and sometimes perpetual) sequences. Further possibilities in cellular automata are provided by Stephen Wolfram ("A New Kind of Science" ISBN 1-57955-008-8, Wolfram Media Inc,
15 2002) who has recently explored and completely characterised many hundreds of millions of binary algorithms. In principle these could be implemented by advanced fluid fountains.

Conceivably, very large arrays of devices could be
20 assembled which would undergo the highly complex "Life" and "Death" phases of cellular automata. The onlooker would see waves, whirls, spasms and inactivities, typical of systems which currently only exist on computer driven video display units.

25 Figure 17 shows schematically a possible arrangement of a logic control module 170 of the type schematically illustrated as module 10/50 in Figure 16. This arrangement reproduces the "Life" automaton referred to above. It has eight control inputs C₁ - C₈, each supplied
30 by a neighbour's active output. The inputs are combined in a network of Y-joints 172, which produces a summation of the signals. This summed signal is applied to three

monostable threshold gates, TGA, TGB and TGC, through weighting restrictors R_1 which set the signal strength that causes each gate to switch. Gate TGA is caused to switch inactive if 2 or more inputs C_{1-8} are active, gate
5 TGB is switched inactive if 3 or more inputs are active, and gate TGC is switched by 4 or more of inputs C_{1-8} being active. Logical processing of the resulting logical functions is then done by fluidic logic devices: two NOR-gates B and S, and two bistable (memory) devices C and N.
10 Bistable N has two control inputs on one side equivalent to an OR function of those inputs. Bistable C holds the current state Alive or Dead of the "cell" represented by the whole circuit. Signals from bistable C are combined with the logical functions from the threshold gates in
15 the NOR gates B & S. NOR gate B generates a signal implying "birth" of a cell from an originally dead state. NOR gate S generates a "sustain" signal which maintains the existing live state of a cell. These signals, which both generate a live state for the next time phase of the
20 automaton, are fed to the next-state bistable N. Bistable N holds the logical state ready for transfer to the "current-state" bistable C via feedback lines F connecting to the input control ports of bistable C. "Death" is produced by a bias signal BS fed from the
25 common fluid power supply S via a restrictor R_2 ; this resets bistable N to the "die" command, unless countermanded by the control inputs from NOR gates B or S.

The cell and the overall cellular automaton exists
30 in a sequence of discrete states controlled by a centrally generated clock signal TS. At regular intervals this activates bistable N and sends strong signals to change the state of bistable C. By

attenuating the signals from N by restrictors (not shown) in the feedback lines, only a very large transfer signal is able to effect the signal transmission. At this high supply power the bistable N is immune from the relatively
5 weak logic signal S from the NOR gates. Hence race hazards are avoided (signals racing round the signal feedback loop out of synchronism with the clock signal).

The fountain display element is bistable C or some other device controlled by it. The cell communicates to
10 others in the array by *LIVE* (active) signals sent from the appropriate output of bistable C.

Figure 18 shows schematically a possible arrangement of a fluidic logic control module 180. This represents one "cell" of a different cellular automaton to that
15 described above. Here, the logical algorithm and the corresponding circuit implement the "rule 30" automaton discovered and described by Stephen Wolfram, (reference above). The cell exists in a sequence of discrete states, each determined by the state of the cell and its
20 two neighbours. The current state of the cell, *ALIVE* or *DEAD* is held in bistable memory element CC. A signal from this, and input signals L and R from left and right neighbouring cells, are processed by a logic circuit consisting of an active OR-gate AO and an exclusive OR-
25 gate EO. The active OR-gate AO is a fluidic monostable switching device and therefore does not attenuate the signal. The exclusive OR-gate EO is not active and therefore also does attenuate the signals.

The output of the exclusive-OR gate EO is the signal
30 fed to bistable memory element NN holding the next state for the cell. The signal from the exclusive OR-gate signifies "ALIVE" for the next state. A bias signal

returns the bistable NN to its "DEAD" state in the absence of an output from the exclusive-OR gate. The time-sequence of states for the cell, and the whole automaton, is controlled by a centrally generated clock signal TS. At regular intervals, this activates bistable NN and sends strong signals to change the state of bistable CC. By attenuating the signals from NN by restrictors (not shown) in the feedback lines FF, only a high pressure transfer signal is able to effect the signal transmission. At this high supply power, the bistable NN is immune from the relatively weak logic signals from the exclusive-OR gate and the bias signal. Only when TS is very low or near zero can its state be controlled by the bias or exclusive OR-gate. However at this low supply pressure bistable NN cannot affect bistable CC. This ensures that the "current" and "next" states are separated by finite time periods and that signals do not race around the system out of synchronism with the transfer signals.

Signals to the cell's neighbours are provided by bistable CC. As part of a fountain, bistable C might be a jet diverter, so acting as a display element itself, or it might control other diverters and/or vortex valves.

Wolfram's "rule 30" automaton is defined in terms of a one-dimensional (a line) array and the foregoing description conforms to that definition. Wrapping up linearly connected cells to form a square or other two-dimensional figure can produce two-dimensional arrays. Other two-dimensional arrays can be produced by slight modifications to the interconnections within and between cells. As an example, the next-state bistables could feed signals to cells in a neighbouring row, rather than the internal feedback to bistable CC just described.

The logical function generated by the circuit is

$$\text{Next-State} = L \vee (R \vee \text{Current-State})$$

where \vee signifies the OR-function and \vee signifies exclusive-OR

- 5 The resulting function is shown in Table III below in which 1 signifies "alive" and 0 "dead."

L	Current State	R	Next State
0	0	0	0
0	0	1	1
0	1	0	1
0	1	1	1
1	0	0	1
1	0	1	0
1	1	0	0
1	1	1	0

Table III

CLAIMS

1. A fountain comprising:
a supply of water under pressure;
a primary fluidic diverter having an input for said
5 supply, and first and second outputs diverging from said
input, two control ports provided with control flow to
direct input flow to one or other of said outputs; and
a vortex amplifier comprising a vortex chamber, a
radial port, a vortex inducing port and an axial output
10 port;
wherein one of said first and second primary
diverter outputs is connected to said vortex inducing
port and the other is connected to said radial port, said
axial port leading to a nozzle whereby an alternating
15 vortex spray or axial jet is produced.
2. A fountain as claimed in claim 1, in which said
control ports are interconnected by an inertia loop,
whereby oscillations are induced in the control flow to
switch flow alternately between said first and second
20 outputs.
3. A fountain as claimed in claim 1 or 2, in which
said first and second outputs of said diverter are vented
to isolate each output from the input.
4. A fountain as claimed in claim 1, in which said
25 outputs have restrictors therein and include feed back
loops into said control ports, whereby oscillations are
induced in the control flow to switch flow alternately
between said first and second outputs.
5. A fountain as claimed in any preceding claim, in
30 which said diverter is cusped between said first and
second outputs to increase stability of flow through said
first and second outputs.

6. A fountain as claimed in any preceding claim, in which said vortex amplifier comprises an annular chamber formed by a tubular housing and central body, supply flow to the amplifier entering said annular chamber at one end, the other end of the annular chamber being terminated by a nozzle plate defining with said central body said vortex chamber, said housing having an opening forming said vortex inducing port.
7. A fountain as claimed in claim 6, in which said vortex inducing port is a passage from a supply chamber outside said housing and arranged tangentially with respect to said vortex chamber.
8. A fountain as claimed in claim 6, in which said vortex inducing port comprises a plurality of said openings in said housing, each opening provided with a vane to tangentially direct radial inflow from a supply chamber surrounding said housing.
9. A fountain as claimed in any preceding claim, in which said nozzle is interchangeable with different nozzles displaying one of various spray patterns when vortex spray issues therefrom.
10. A fountain as claimed in any preceding claim, in which a spray catcher is disposed beyond the nozzle to deflect vortex spray issuing from said nozzle, the catcher having an orifice to permit passage of said axial jet to flow unimpeded.
11. A fountain as claimed in claim 10, in which the catcher is inverted so as to destroy entirely said vortex spray.
12. A fountain system incorporating a fountain as claimed in any preceding claim, in which two of said vortex amplifiers are provided in parallel, each with its own supply to its radial port, each vortex inducing port

being connected to one or other of said first and second outputs of the primary diverter.

13. A fountain system as claimed in claim 12, in which said axial outputs of the two vortex amplifiers lead to further components of the system which are arranged to be controlled by greater or lesser flow rates that issue from said axial outputs of the vortex amplifiers depending on whether there is flow into said vortex inducing port.
- 10 14. A fountain system as claimed in claim 12 or 13, or one incorporating only a fountain as claimed in any of claims 1 to 11, in which two of said primary diverters are provided whose first outputs are joined together and comprise the radial input for said vortex amplifier, and 15 whose second outputs are connected to separate vortex inducing ports of said vortex amplifier, whereby several modes of operation of the vortex amplifier results.
15. A fountain system as claimed in claim 14, when dependent on claim 2, in which by one of said control 20 loops controls each diverter, each loop being of different length.
16. A fountain system as claimed in any of claims 12 to 15, or one incorporating only a fountain as claimed in any of claims 1 to 11, in which a self-oscillating vortex 25 nozzle is provided, comprising a cylindrical vortex chamber having a central output nozzle and an input comprising a section of the cylindrical wall of the chamber to which an input chamber is connected, a narrowing of the input chamber being provided at the 30 input section of the vortex chamber, whereby flow entering the vortex chamber oscillates between swirling entry and straight radial entry leading to oscillations in the out put between a straight jet and a swirling spray.

17. A fountain system as claimed in any of claims 12 to 16, or one incorporating only a fountain as claimed in any of claims 1 to 11, in which a wind detection and adjustment device is provided, comprising a catcher for water issuing from a fountain display and falling under no-wind conditions, and a wind control diverter having a supply input, first and second wind control outputs diverging from said supply input, two wind control ports to direct supply input flow to one or other of said outputs, wherein water caught by the catcher is supplied to one control port to direct supply input flow to said first wind control output, the other control port being supplied from a feedback loop from said first wind control output that switches supply input flow to said second wind control output when no water flows from said catcher.

18. A fountain system as claimed in claim 17, in which said first wind control output is connected to the radial port of a fountain supply vortex amplifier to provide a strong flow therethrough, and said second wind control output is connected to a tangential port of a vortex amplifier to provide a weak flow therethrough, output from the fountain supply vortex amplifier supplying the fountain display.

19. A fountain system as claimed in any of claims 12 to 18, or one incorporating only a fountain as claimed in any of claims 1 to 11, in which manual control is provided, comprising a manual diverter having a manual input, first and second manual outputs diverging from said manual input, first and second manual control ports to direct said input flow to one or other of said outputs, wherein each control port is supplied by a branch from said manual supply, each branch being controlled by a first restrictor and at least the first

control port branch having a second restrictor, a selectively blockable vent being provided between said first and second restrictor whereby, when said vent is blocked, said restrictors are such that control flow is primarily through said first manual control port and, when said vent is not blocked, control flow is primarily through said second port.

20. A fountain system as claimed in claim 19, in which both branches have a second restrictor, and both have a selectively blockable vent between their respective first and second restrictors.

21. A fountain system as claimed in any of claims 12 to 20, or one incorporating only a fountain as claimed in any of claims 1 to 11, in which a pilot diverter is provided, comprising a pilot flow input, first and second pilot outputs diverging from said pilot input, two pilot control ports provided with control flow to direct pilot input flow to one or other of said pilot outputs, which pilot outputs comprise the control ports of said primary diverter.

22. A fountain system as claimed in claim 21, in which said pilot diverter is in the form of a logic module receiving a plurality of inputs from different sources whereby the direction of switching of said primary diverter may be dependent on a plurality of factors controlled by said logic module.

23. A fountain system as claimed in any of claims 12 to 22, or one incorporating only a fountain as claimed in any of claims 1 to 11, in which multiple logic diverters are provided connected in a logic circuit, wherein each logic diverter has a logic flow input, first and second logic outputs diverging from said logic input, two logic control ports provided with control flow to direct logic input flow to one or other of said logic outputs, which

logic outputs supplies the control ports of any other logic diverter, any pilot diverter or said primary diverter.

24. A fountain system as claimed in claim 23,
5 comprising a plurality of diverters, some providing alternating jets directly, and others feeding vortex amplifiers providing alternating jets and sprays, each diverter being controlled by said logic module having a number of inputs, one of said inputs being connected to
10 one output of a neighbouring diverter, and another of said inputs being connected to the other output of said neighbouring diverter or to one output of a different neighbouring diverter.

25. A fountain system as claimed in claim 24, in which
15 a neighbouring diverter for a diverter on one side of the fountain display comprises a diverter on the opposite side of the display, whereby the display is topologically on the surface of a sphere.

26. A fountain system as claimed in claim 25, in which
20 said diverters are arranged in a square formation and each diverter has eight neighbours, said logic module having four inputs on one side and four on the other.

27. A fountain and a fountain display, substantially as
hereinbefore described with reference to the accompanying
25 drawings.

28. A wind detection device comprising a catcher for
liquid issuing from a detecting jet and falling under no-
wind conditions, an outflow from the catcher for liquid
caught by the catcher, and means to detect liquid in the
30 catcher.

29. A wind detection device as claimed in claim 28, in
which said means to detect comprises a pressure sensor
sensitive to hydrostatic pressure of liquid in the
catcher.

30. A wind detection device as claimed in claim 28, in which said means to detect comprises a flow detector sensitive to outflow of liquid from the catcher.
31. A wind detection device as claimed in claim 28, 29
s or 30, in which the detecting jet is vertical.
32. A wind detection device as claimed in claim 31, in which the jet is vertically upwards, from the centre of the catcher.
33. A wind detection device as claimed in any of claims
10 28 to 32, in which said means to detect is non-fluidic.
34. A wind detection device, substantially as hereinbefore described with reference to the accompanying drawings.
35. A fountain display, comprising at least two display
15 elements, each element being driven by at least one output of a diverter directly associated with each element and controlled by a logic module, each diverter comprising an input for a supply of liquid, and first and second outputs diverging from said input, and at least
20 one control port selectively provided with control flow to direct input flow to one or other of said outputs, and each logic module having at least two inputs and at least one output connected to the control port of the diverter to provide said control port with said selective control
25 flow, and wherein at least one output of the diverter of one element is connected to one input of the logic module of another element.
36. A fountain display as claimed in claim 35, wherein each element has two modes of operation, one mode driven
30 by one output of said associated diverter and the other mode being driven by the other output of said associated diverter, said connection to said input of the logic module of said another element being a branch of one of said outputs of said associated diverter.

37. A fountain display as claimed in claim 36, in which said logic module comprises multiple logic diverters in a logic circuit, wherein each logic diverter has a logic flow input, first and second logic outputs diverging from said logic input, two logic control ports provided with control flow to direct logic input flow to one or other of said logic outputs, which logic outputs supplies the control ports of any other logic diverter, or the, or one, output of the logic module.
- 10 38. A fountain display as claimed in claim 36 or 37, in which the display elements are in a formation in which each element is surrounded by N neighbouring ones of said elements and in which each logic module has N inputs, one from said branch of each neighbour.
- 15 39. A fountain display as claimed in claim 38, in which the number N of neighbours and inputs is the same for each element, the display being arranged as a topological sphere.
40. A fountain display as claimed in claim 38 or 39, in which the formation is square, and N is eight.
- 20 41. A fountain display as claimed in claim 38, 39 or 40, arranged to emulate a cellular automaton demonstrating the "Life" process of J H Conway.
42. A fountain display as claimed in claim 38, 39 or 40, arranged to emulate a cellular automaton demonstrating the "rule 30" algorithm of S Wolfram.
- 25 43. A fountain display as claimed in any of claims 35 to 41 incorporating a wind detection device as claimed in any of claims 28 to 34, or wherein one or more of said display elements comprises a fountain as claimed in any of claims 1 to 11, or wherein the display comprises a fountain system as claimed in any of claims 12 to 26.
- 30

44. A fountain, fountain display, or fountain system,
or a wind detection device, substantially as hereinbefore
described with reference to the drawings.

ABSTRACT

Display Fountain, System, Array and Wind Detector

A fountain (50) comprises a supply of water under
5 pressure, a primary fluidic diverter (10) having an input
(12) for said supply, and first and second outputs (16a,b)
diverging from said input. Two control ports (20a,b) are
provided with control flow to direct input flow to one or
other of the two outputs that lead to the two inputs of a
10 vortex amplifier (40). This comprises a vortex chamber
(54), a radial port (50), a vortex inducing port (60) and
an axial output port (58).


One (16a) of the diverter outputs is connected to the
15 vortex inducing port, the other (16b) to the radial port,
so that supply to said axial output port is modulated by
formation of a vortex in the chamber when flow is to the
vortex inducing port. The axial port leads to a nozzle
whereby a vortex spray or axial jet is produced, depending
20 on which diverter output (16a,b) is active.

Figure 8a

A wind detector (100) has a vertical jet (102) and a
catcher (104) which fails to catch water from the jet in
25 high wind conditions. The catcher feeds the control port
(20a) of a diverter 10₁, or such other pressure or flow
detector as may be convenient.


Figure 11

30 A fountain array of elements may comprise a number of
diverters, the outputs of which have branches supplying
the control ports of others in the array, whereby internal
control is provided.

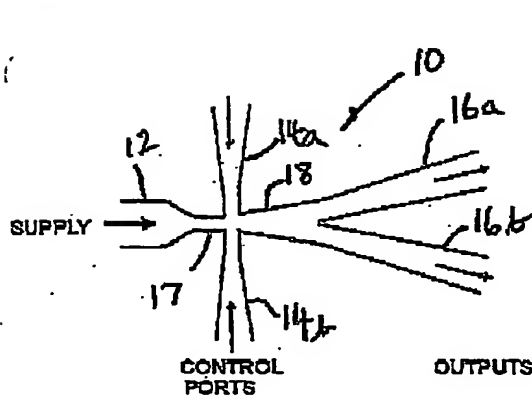


UNVENTED BISTABLE FLUID AMPLIFIER (FLUIDIC DIVERTER)

Figure 1a

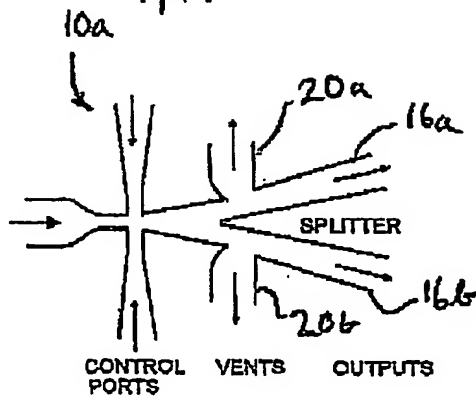


VENTED BISTABLE FLUID AMPLIFIER (FLUIDIC LOGIC FLIP-FLOP)

Figure 1b




SYMBOL

Figure 1c

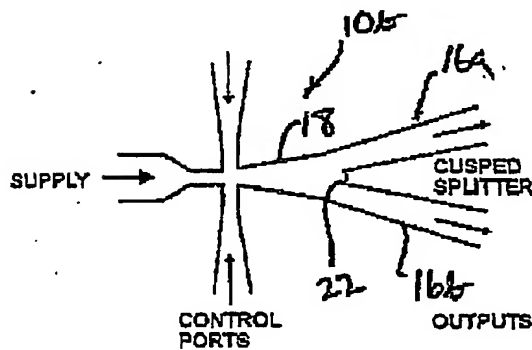


FLUIDIC DIVERTER WITH CUSPED SPLITTER GIVING HIGH STABILITY

Figure 1d

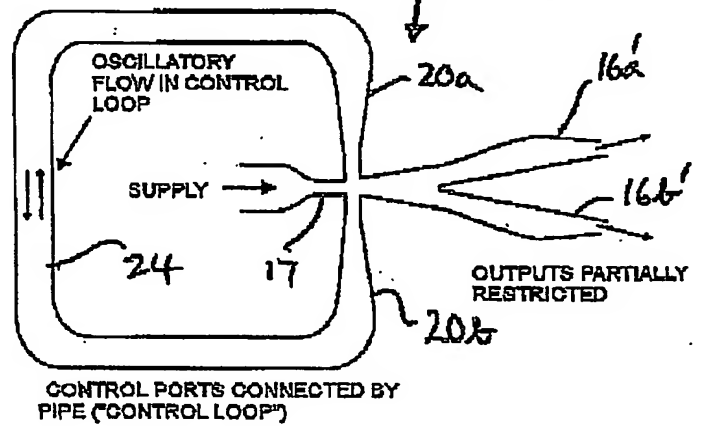

CONTROL-LOOP OSCILLATOR: FLUIDIC DIVERTER WITH CONTROL PORTS CONNECTED BY PIPE

Figure 1e




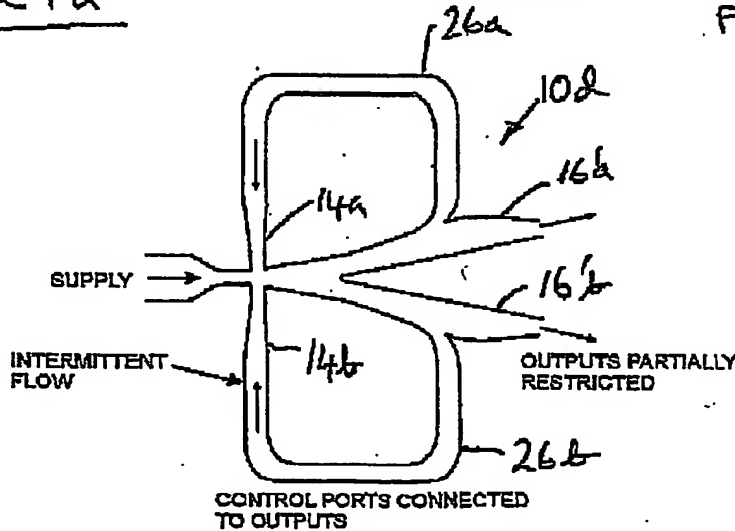


FLUIDIC FEEDBACK OSCILLATOR

Figure 1f




GENRLBA.001
JRT 23/9/02

2/17

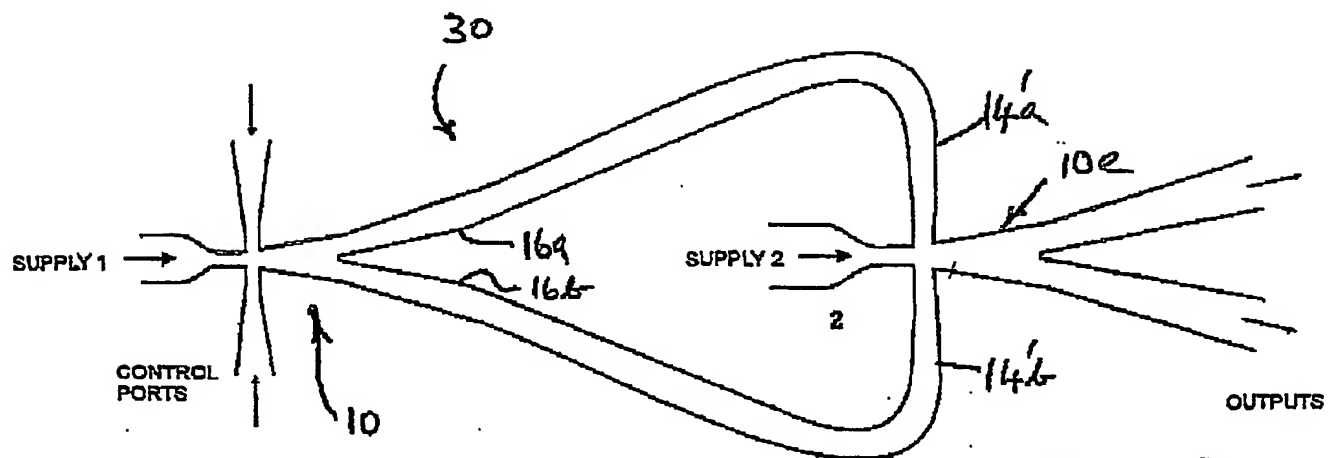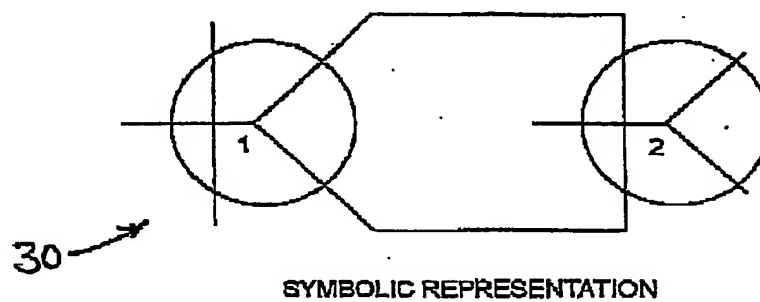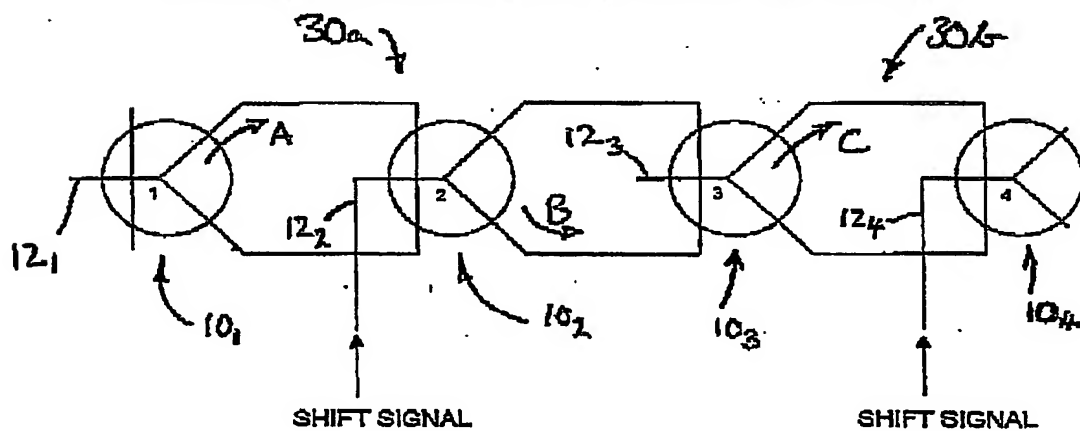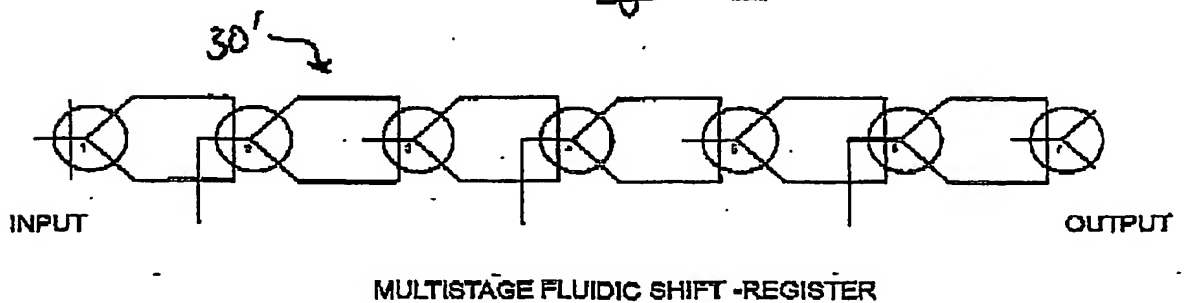
Figure 2aFigure 2b**2-STAGE FLUIDIC BISTABLE AMPLIFIER OR FLOW DIVERTER**Figure 2cFigure 2d

BACCTS.CDR JRT 23/9/02


3/17

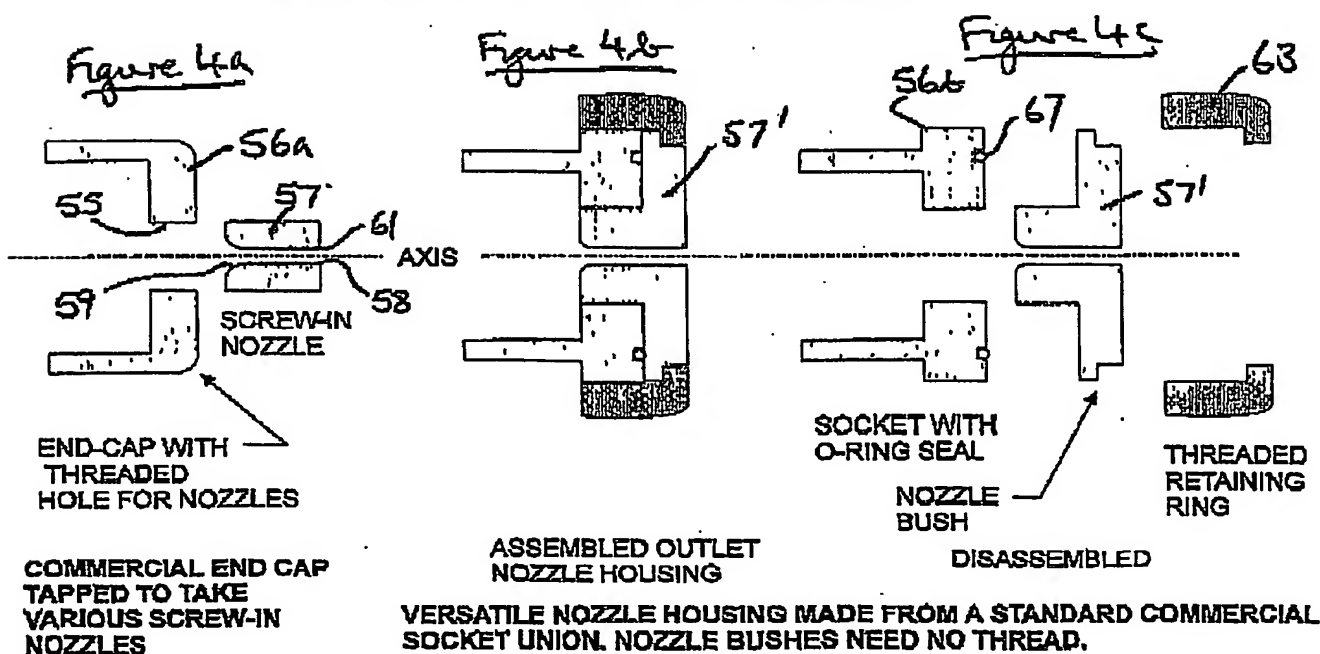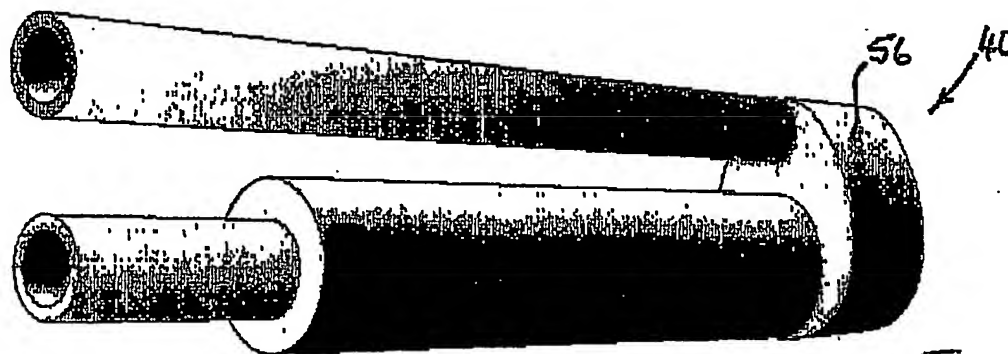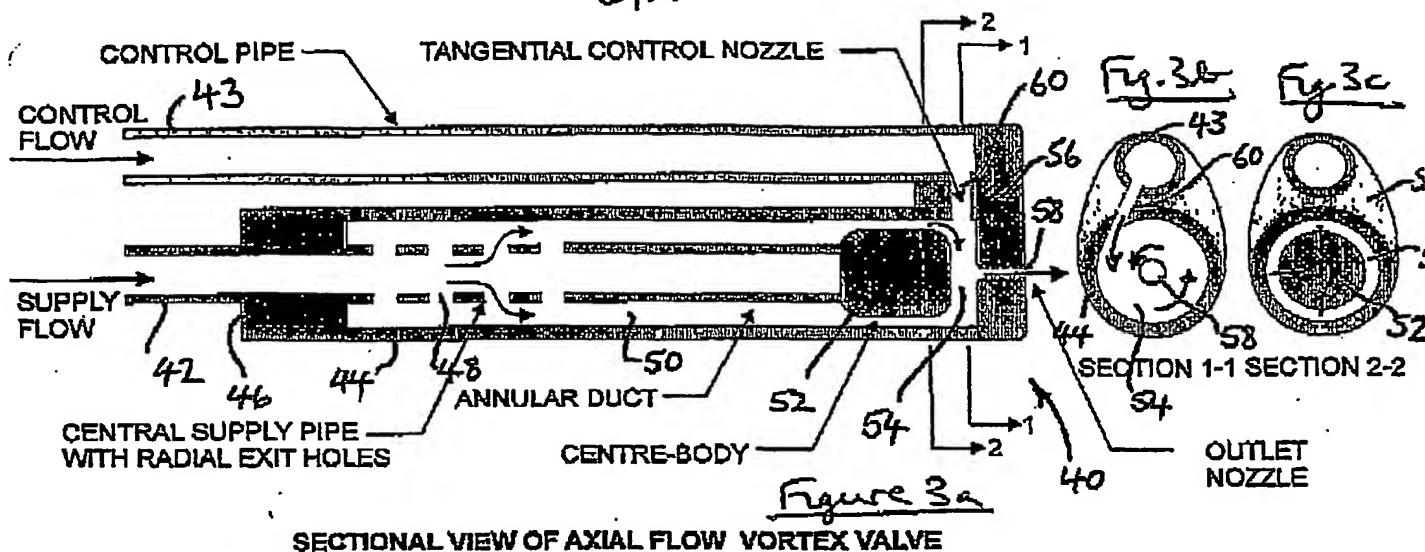

4117

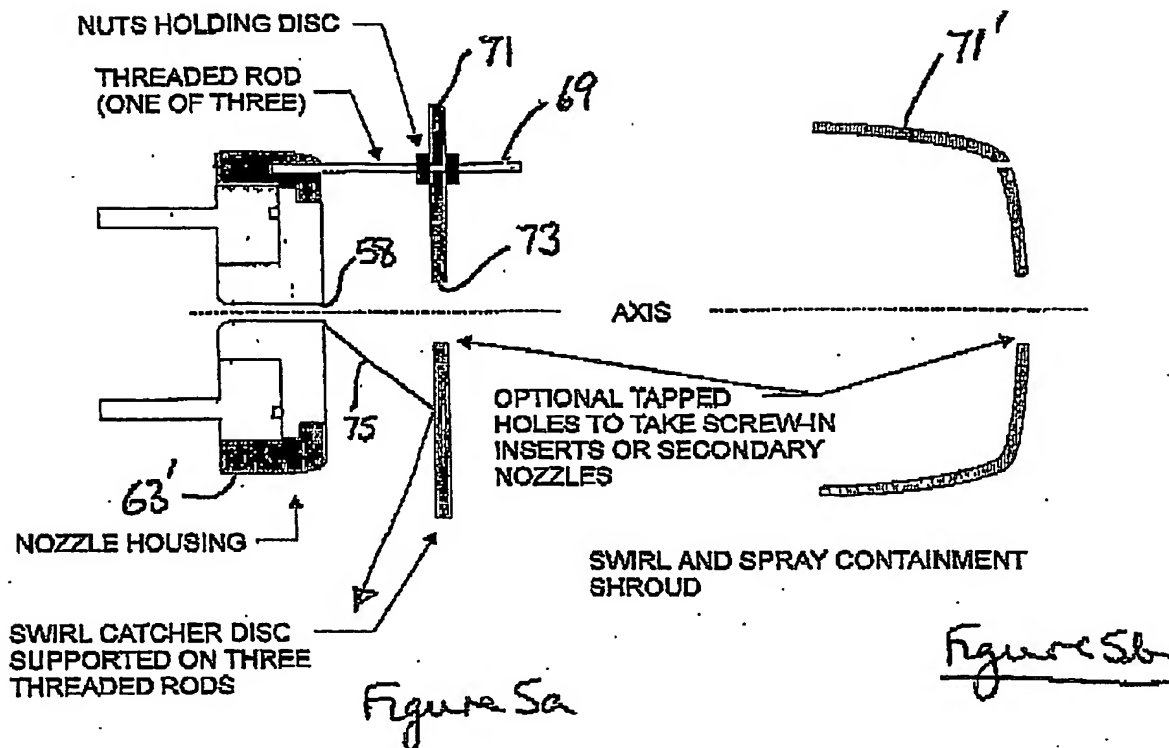


OUTLET NOZZLE HOUSING AND METHOD OF SUPPORTING OUTFLOW MODIFIERS
(eg: SWIRL CATCHING DISC AND SHROUD)

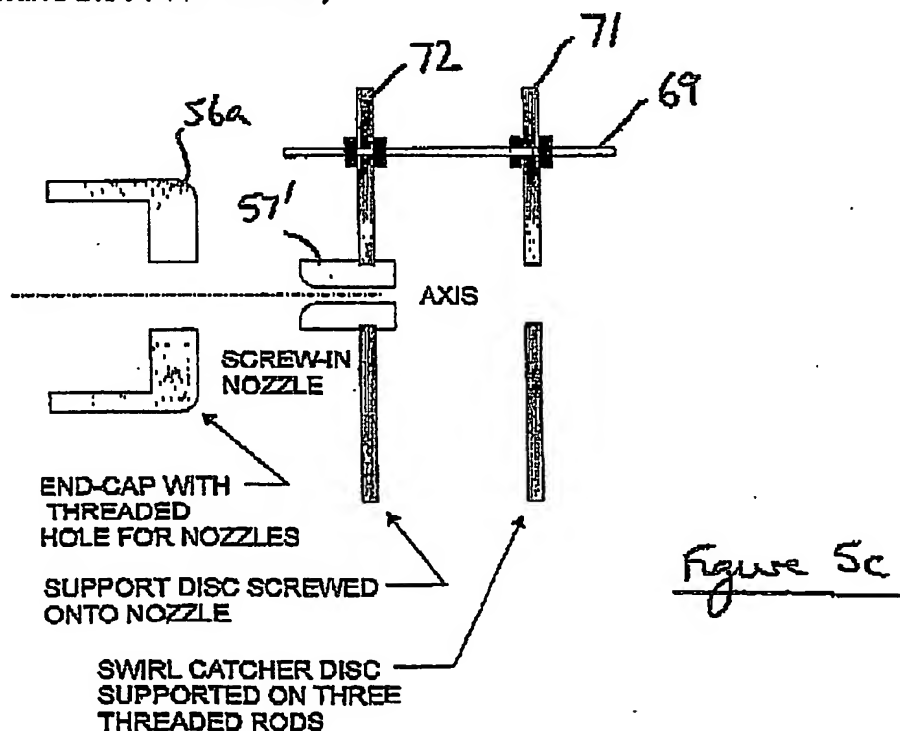


ALTERNATIVE METHOD OF MOUNTING OUTFLOW MODIFIERS


S117

Figure 6a


BASIC NOZZLE
GIVES CONICAL
SPRAY AND
GOOD JET

Figure 6aFigure 6b


NOZZLE WITH
ROUNDED
EXIT. GIVES
FLAT OR VERY
WIDE SPRAY.

Figure 6c


SLOT NOZZLE
GIVING A FLAT
JET

Figure 6d

STEPPED BORE NOZZLE
GIVES TIGHT SPRAY AND
GOOD JET




MULTI-JET
NOZZLE

Figure 6e


ADAPTER TO TAKE
SMALL SCREW-IN
NOZZLE INSERTS.

Figure 6f


OUTLET NOZZLES AND ADAPTERS

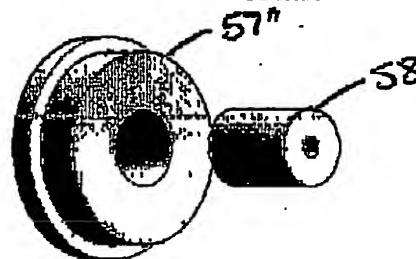


SMALL SCREW-IN
NOZZLE INSERT.
ABLE TO HAVE
VARIOUS NOZZLE
DESIGNS.

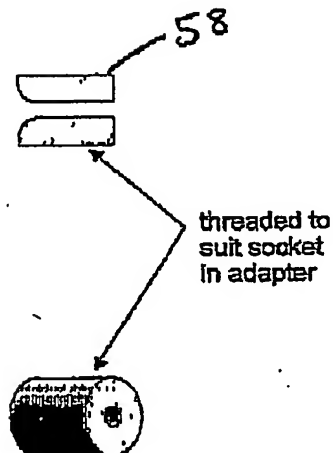Figure 6g


6/17

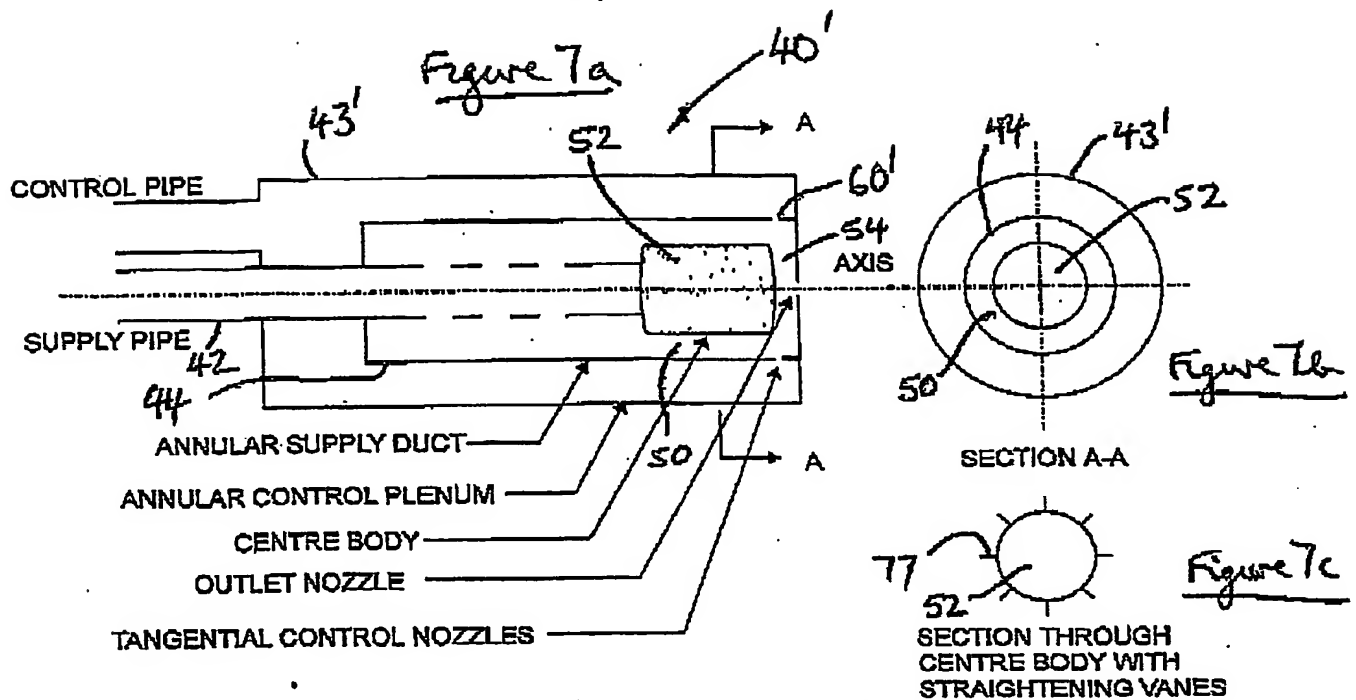


ANNULAR CONSTRUCTION MODE FOR VORTEX VALVE

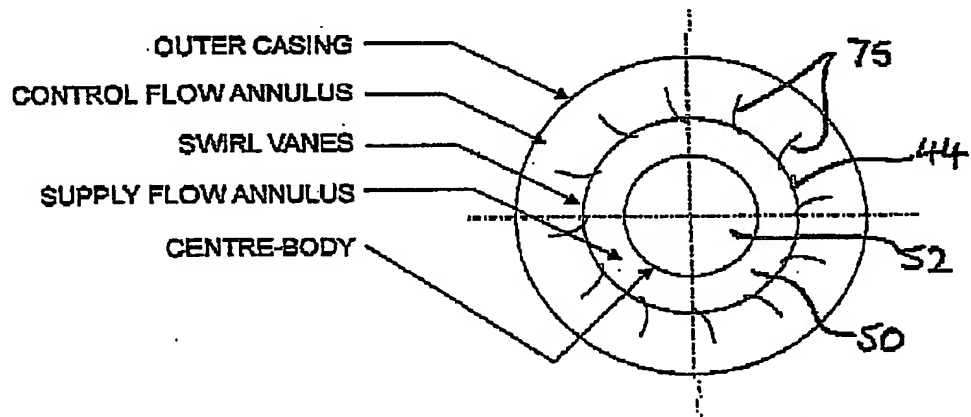ALTERNATIVE MEANS OF PRODUCING SWIRL FLOW
(VANES REPLACE TANGENTIAL CONTROL NOZZLES)**Figure 7d**


7/17

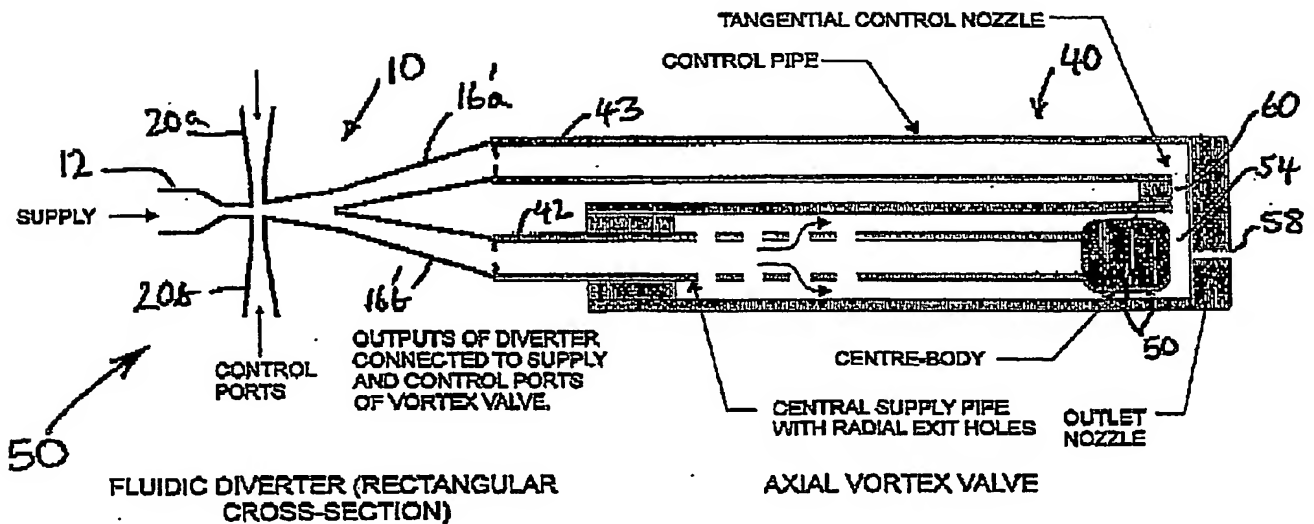

SECTIONAL VIEW OF INTEGRATED DIVERTER SWITCHED VORTEX VALVE

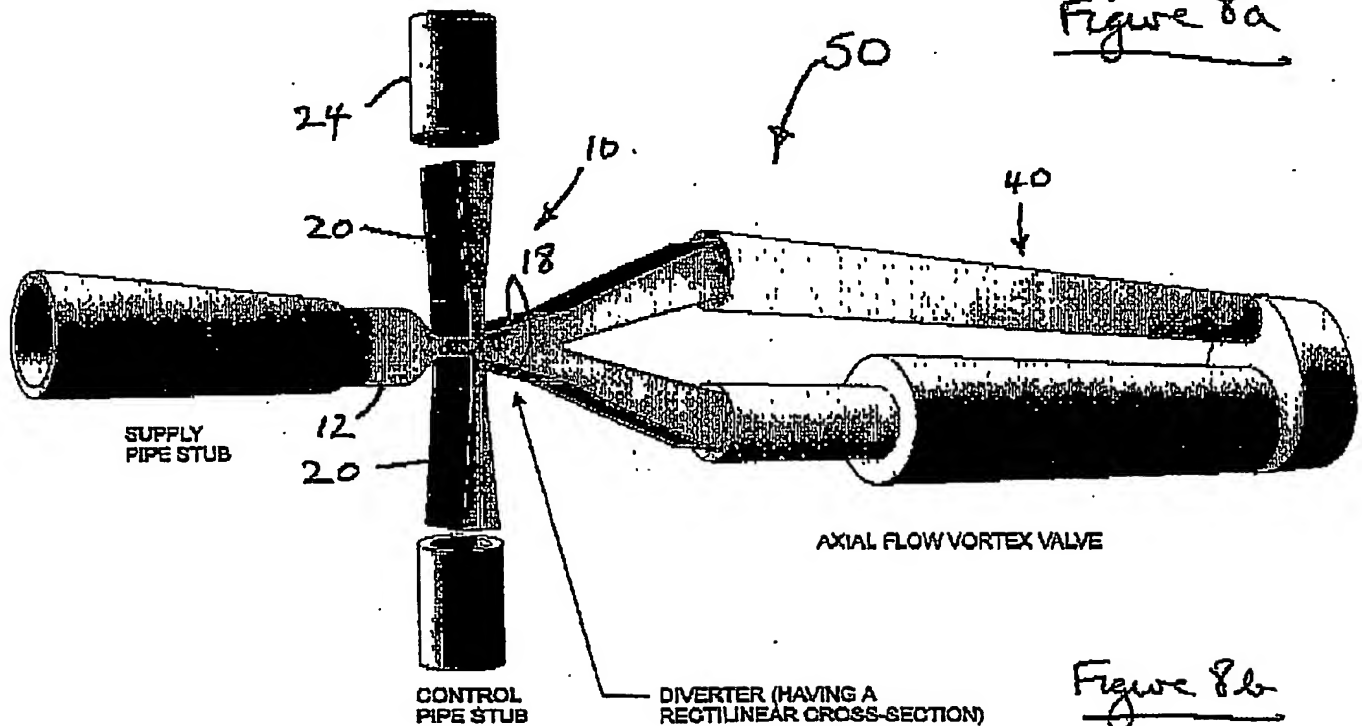


PERSPECTIVE VIEW OF COMPONENTS COMPRISING THE INTEGRATED SWITCHED VORTEX VALVE

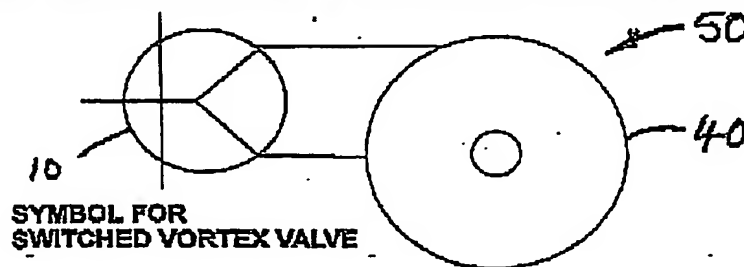

svargen.CDR JRT 25 sept 02

Figure 8c

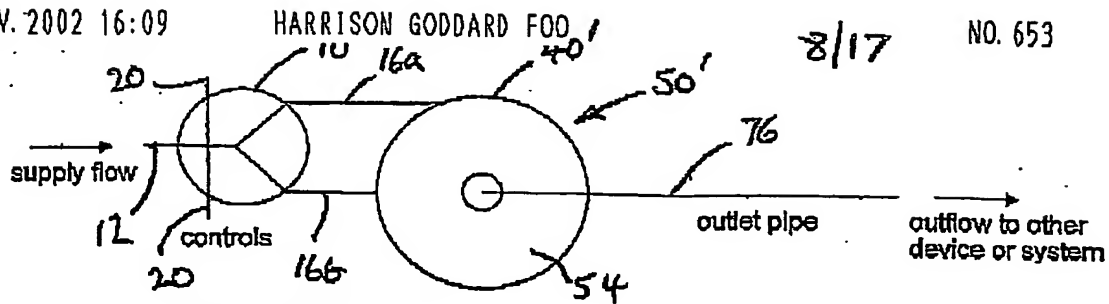

SWITCHED VORTEX VALVE USED AS CONTROL VALVE

Figure 9a


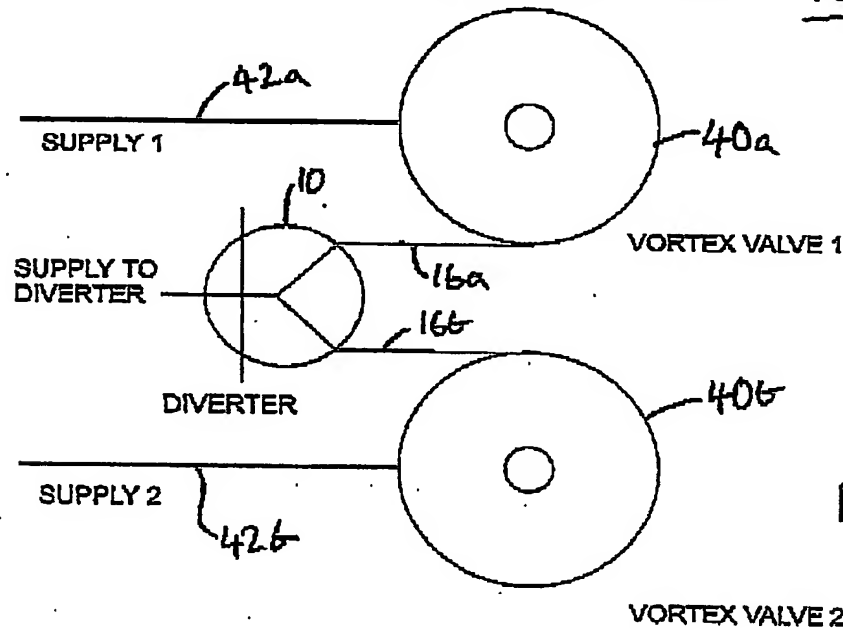


Figure 9b


DIVERTER CONTROLLING TWO VORTEX VALVES ALTERNATELY

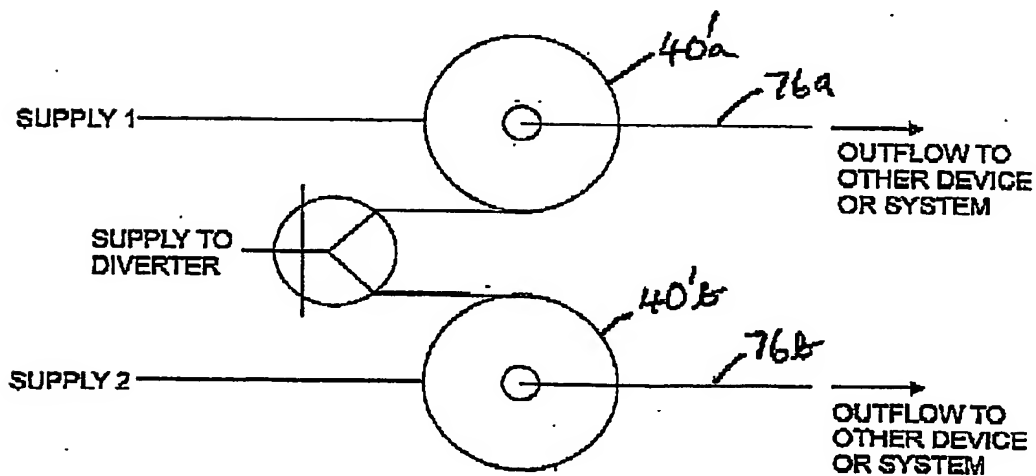





DIVERTER CONTROLLING TWO DEVICES OR SYSTEMS BY WAY OF VORTEX VALVES.

Figure 9c


9/17

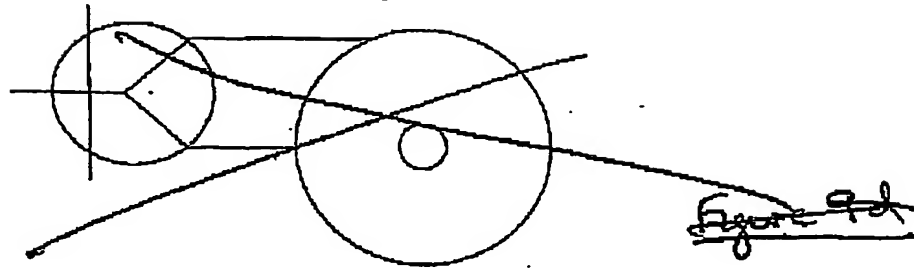

SWITCHED VORTEX VALVE HAVING ONE DIVERTER

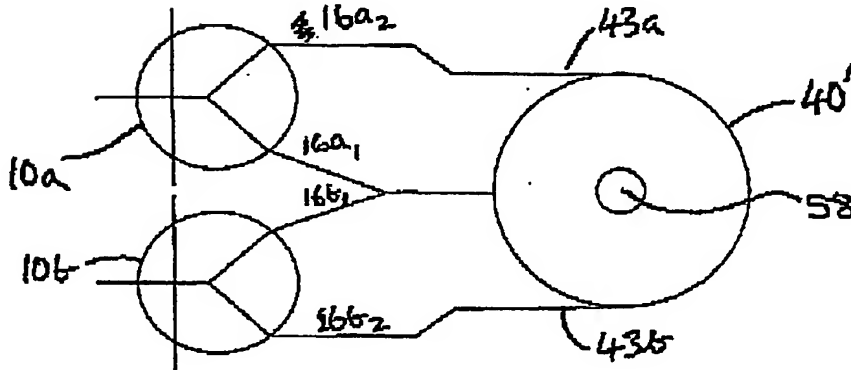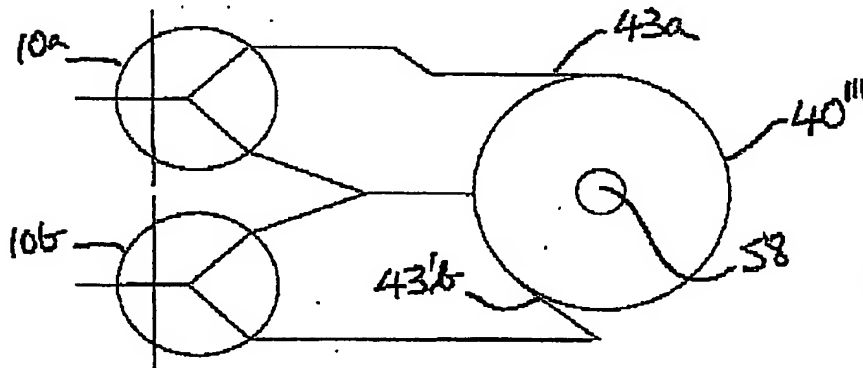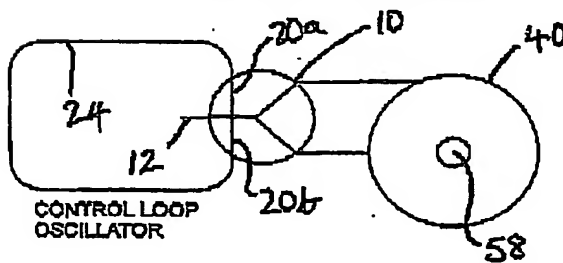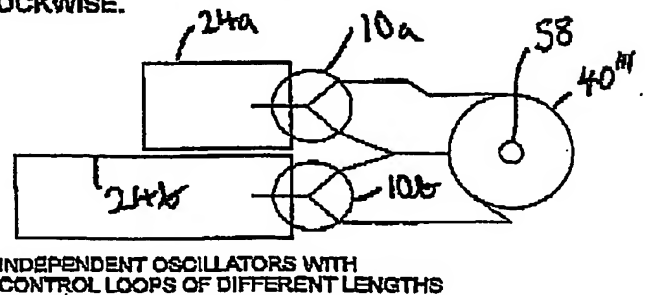VORTEX VALVE FED BY TWO INDEPENDENT DIVERTERS.
CONTROL FLOWS IN OPPOSITE DIRECTIONS.VORTEX VALVE FED BY TWO INDEPENDENT DIVERTERS.
CONTROL FLOWS ARE BOTH CLOCKWISE.CONTROL LOOP
OSCILLATORINDEPENDENT OSCILLATORS WITH
CONTROL LOOPS OF DIFFERENT LENGTHSFigure 9fOSCILLATORY SWITCHED VORTEX VALVES USING A
DIVERTERS WITH CONTROL LOOPSFigure 9g


10/17

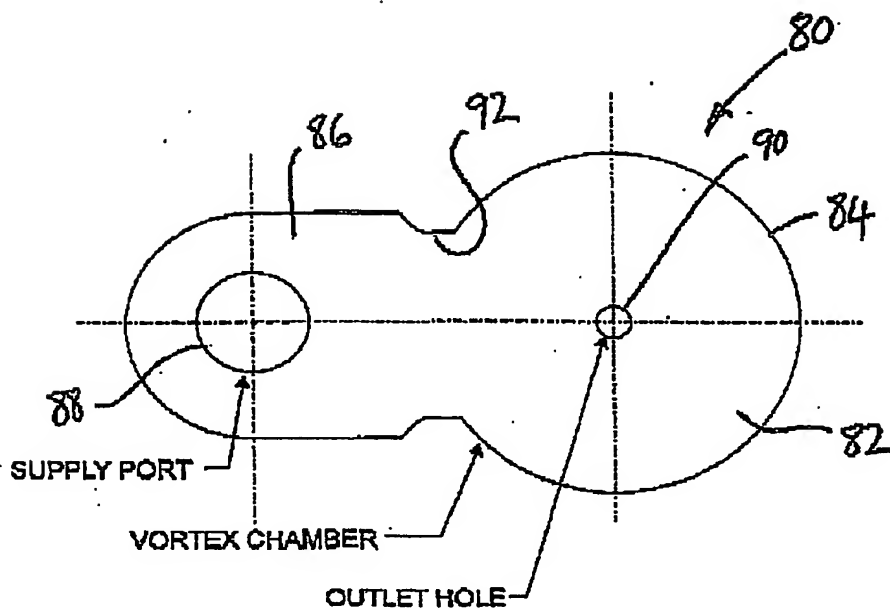


PLAN VIEW. DEPTH OF PROFILE APPROXIMATELY
ONE TENTH OF VORTEX CHAMBER DIAMETER.

SELF OSCILLATING VORTEX NOZZLE

Figure 10

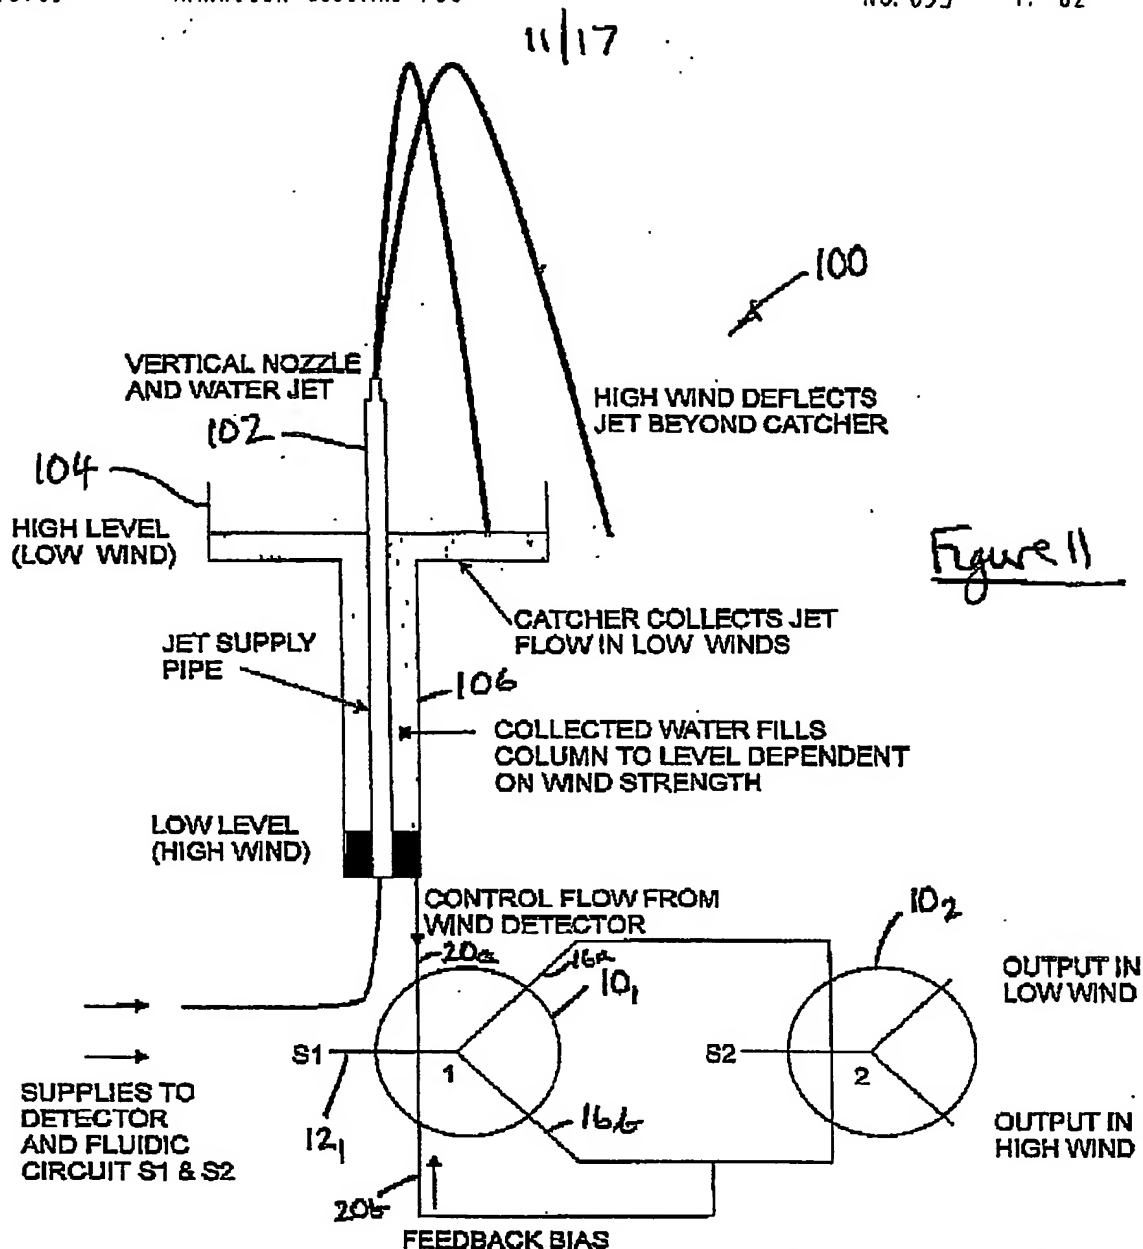


NO-MOVING-PART FLUIDIC WIND DETECTING AND SIGNAL AMPLIFICATION SYSTEM

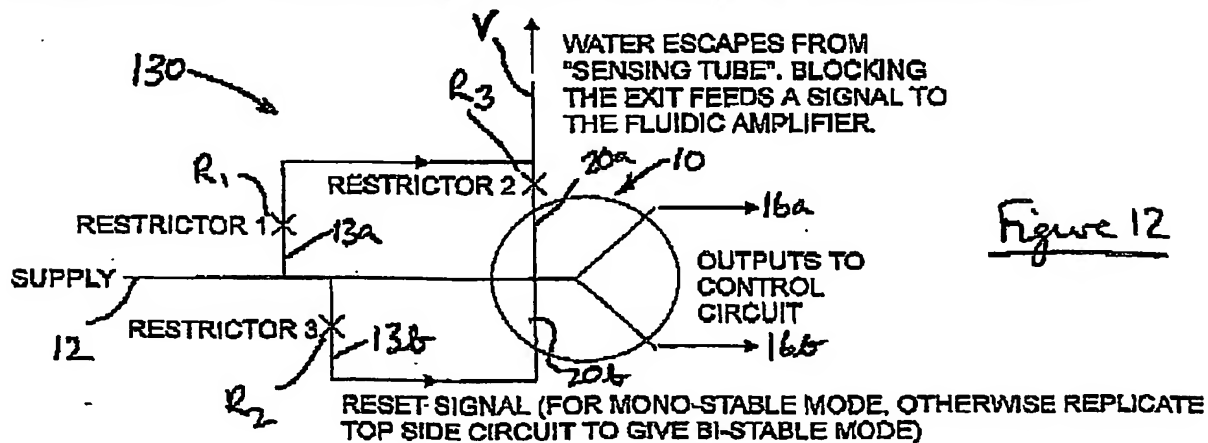

METHOD OF PROVIDING MANUAL CONTROL SIGNALS TO FLUIDIC SYSTEM





12/17

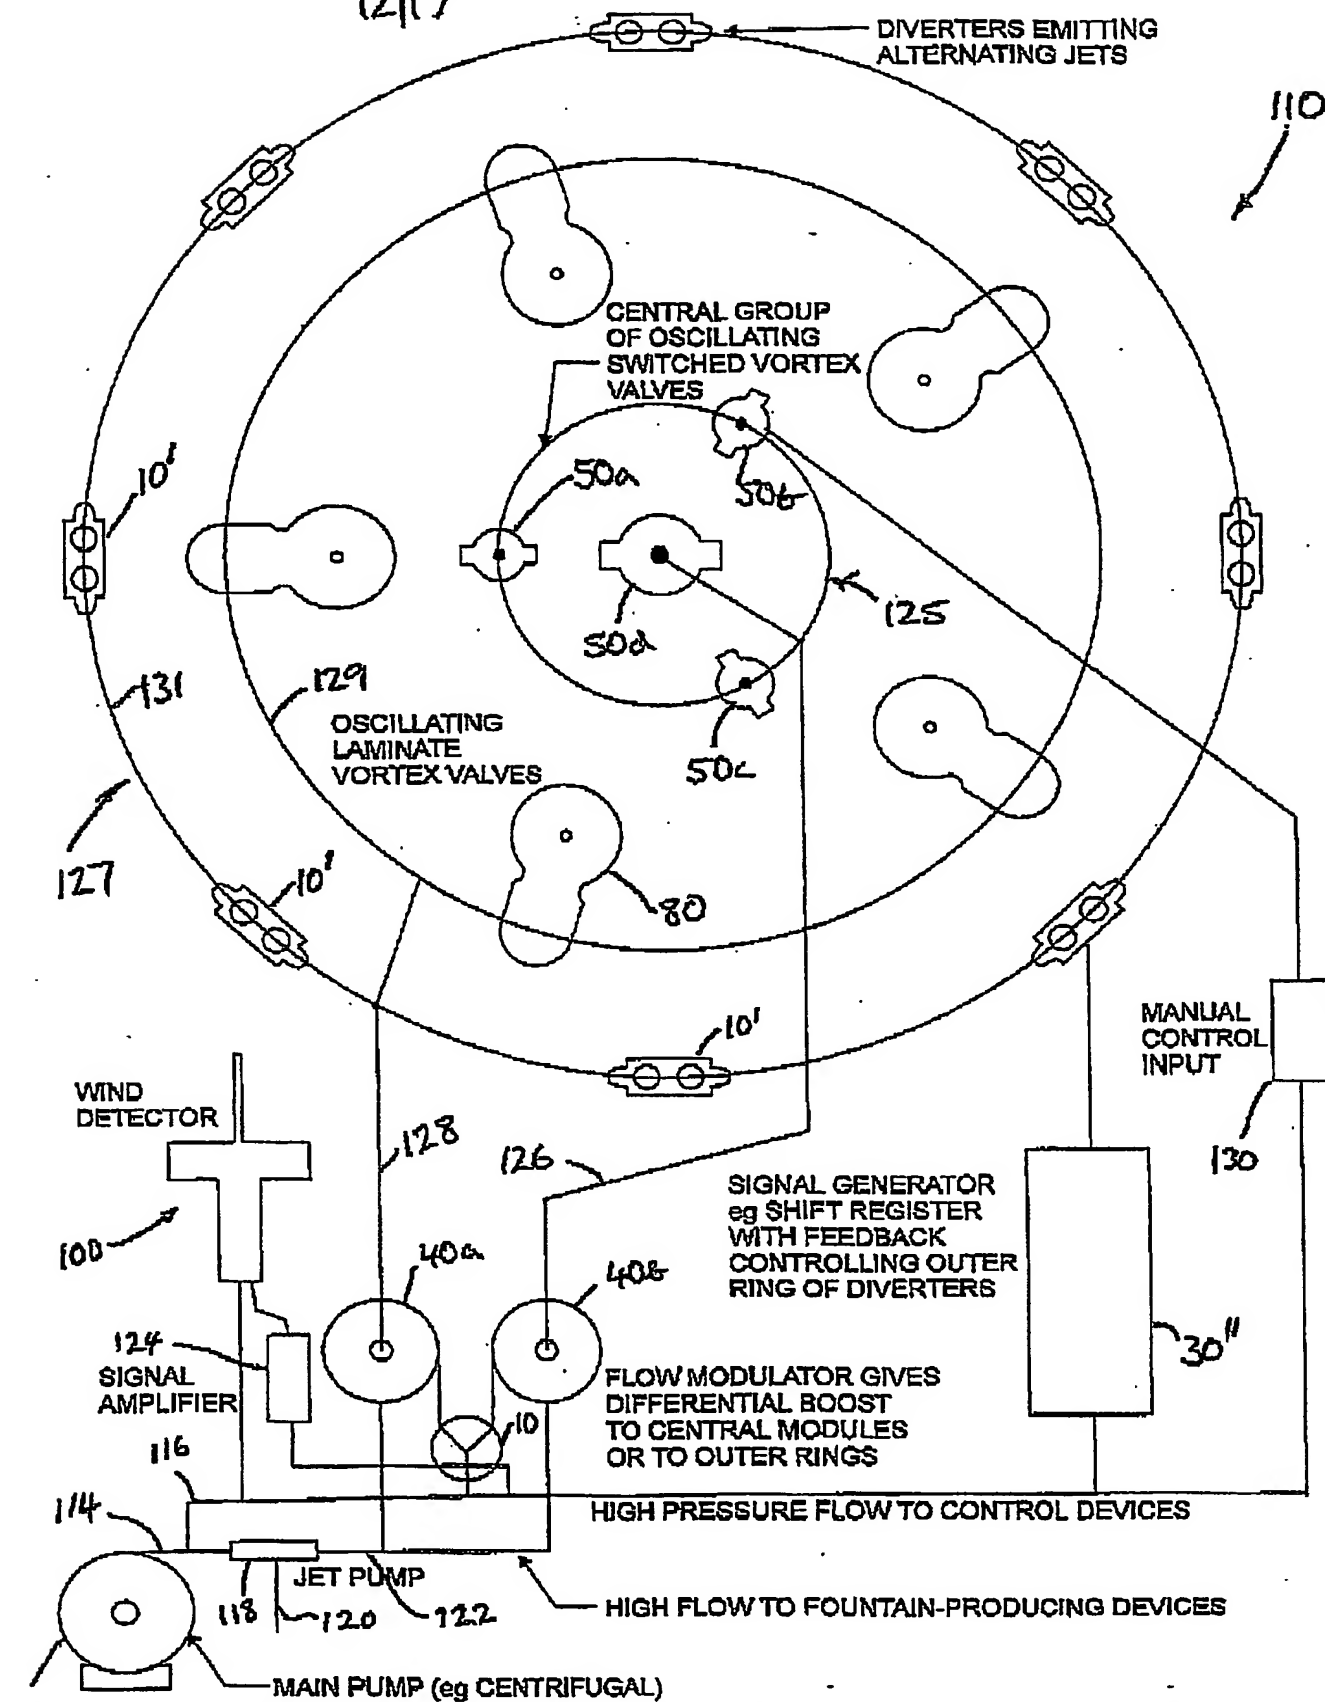


LARGE-SCALE DISPLAY USING SEVERAL INNOVATIVE FLUIDIC TECHNIQUES

Figure 13

(3/17

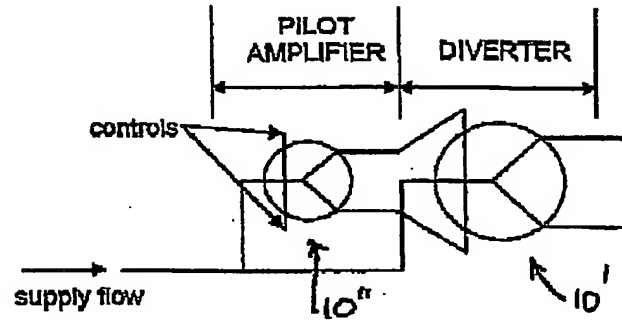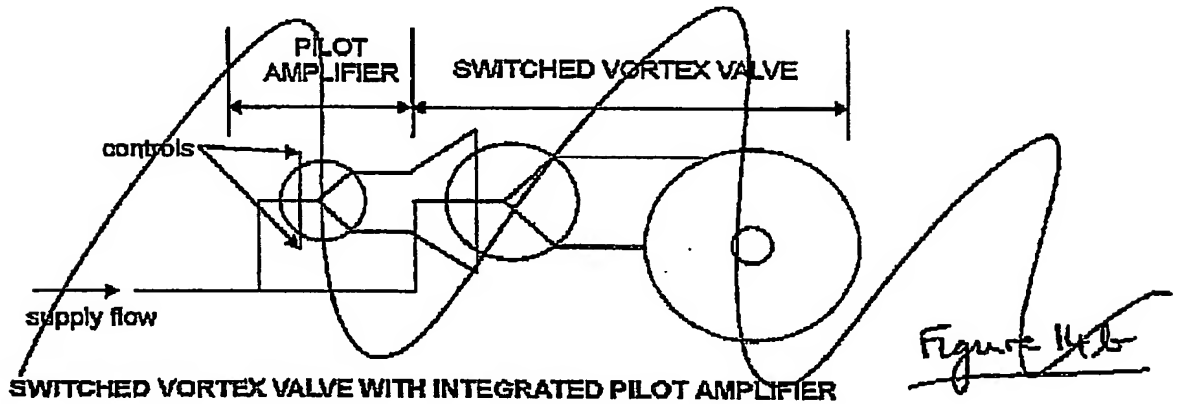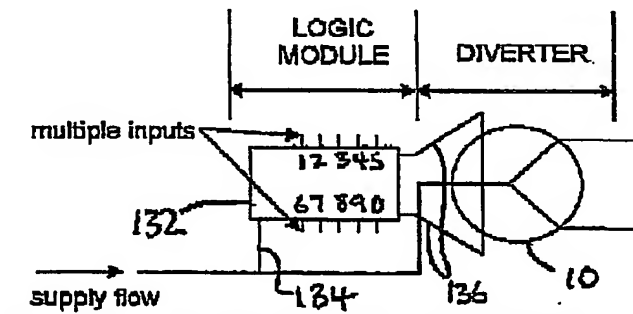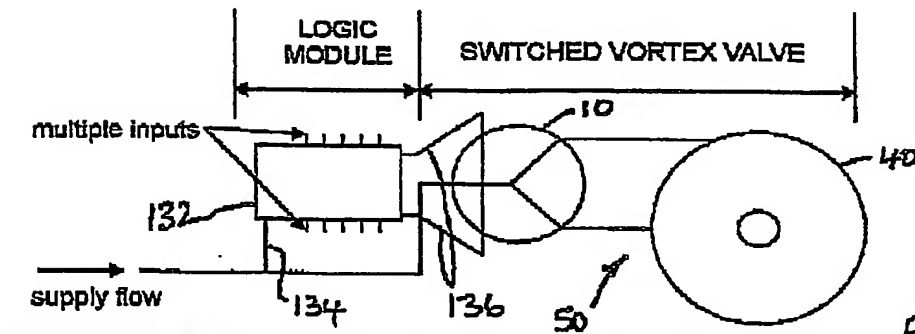Figure 14a**DIVERTER WITH INTEGRATED PILOT AMPLIFIER**Figure 14b**SWITCHED VORTEX VALVE WITH INTEGRATED PILOT AMPLIFIER**Figure 14c**DIVERTER WITH INTEGRATED LOGIC MODULE**Figure 14d**SWITCHED VORTEX VALVE WITH INTEGRATED LOGIC MODULE**

14/17

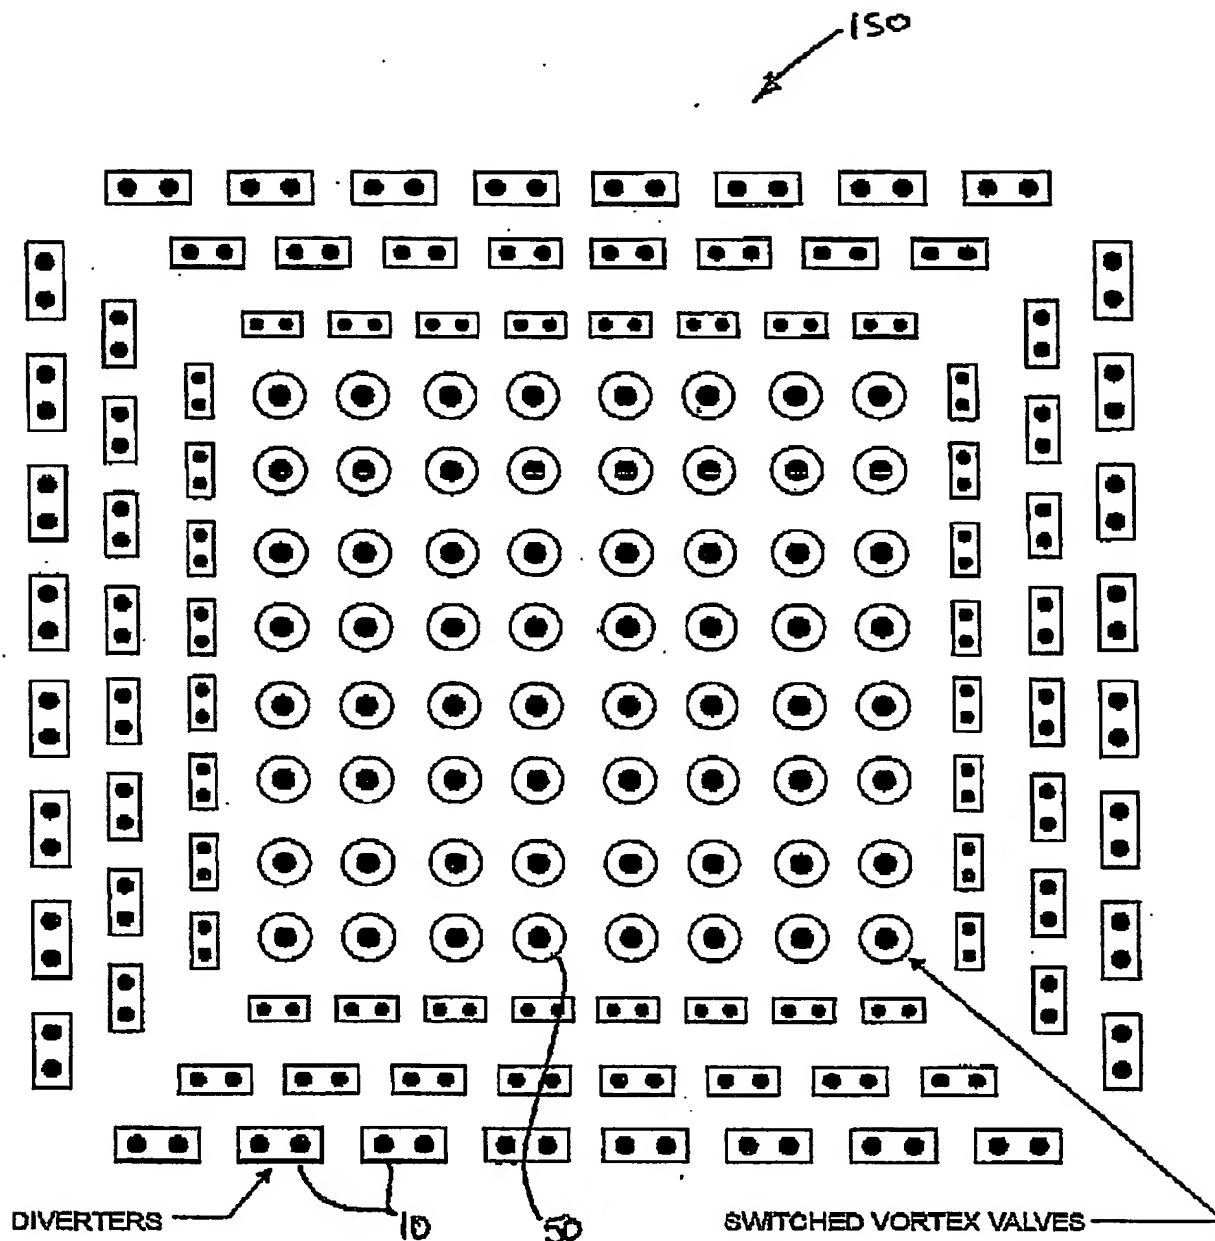

Each device is connected by input and output signals to the surrounding eight devices.
At edges signals transmit to opposite edges producing a topological sphere for signals.

**ARRAY OF SWITCHED VORTEX VALVES AND DIVERTERS WITH INTEGRATED LOGIC CONTROL MODULES
INTERCONNECTION IMPLEMENTS CELLULAR AUTOMATA FUNCTIONS**

Figure 15

15/17


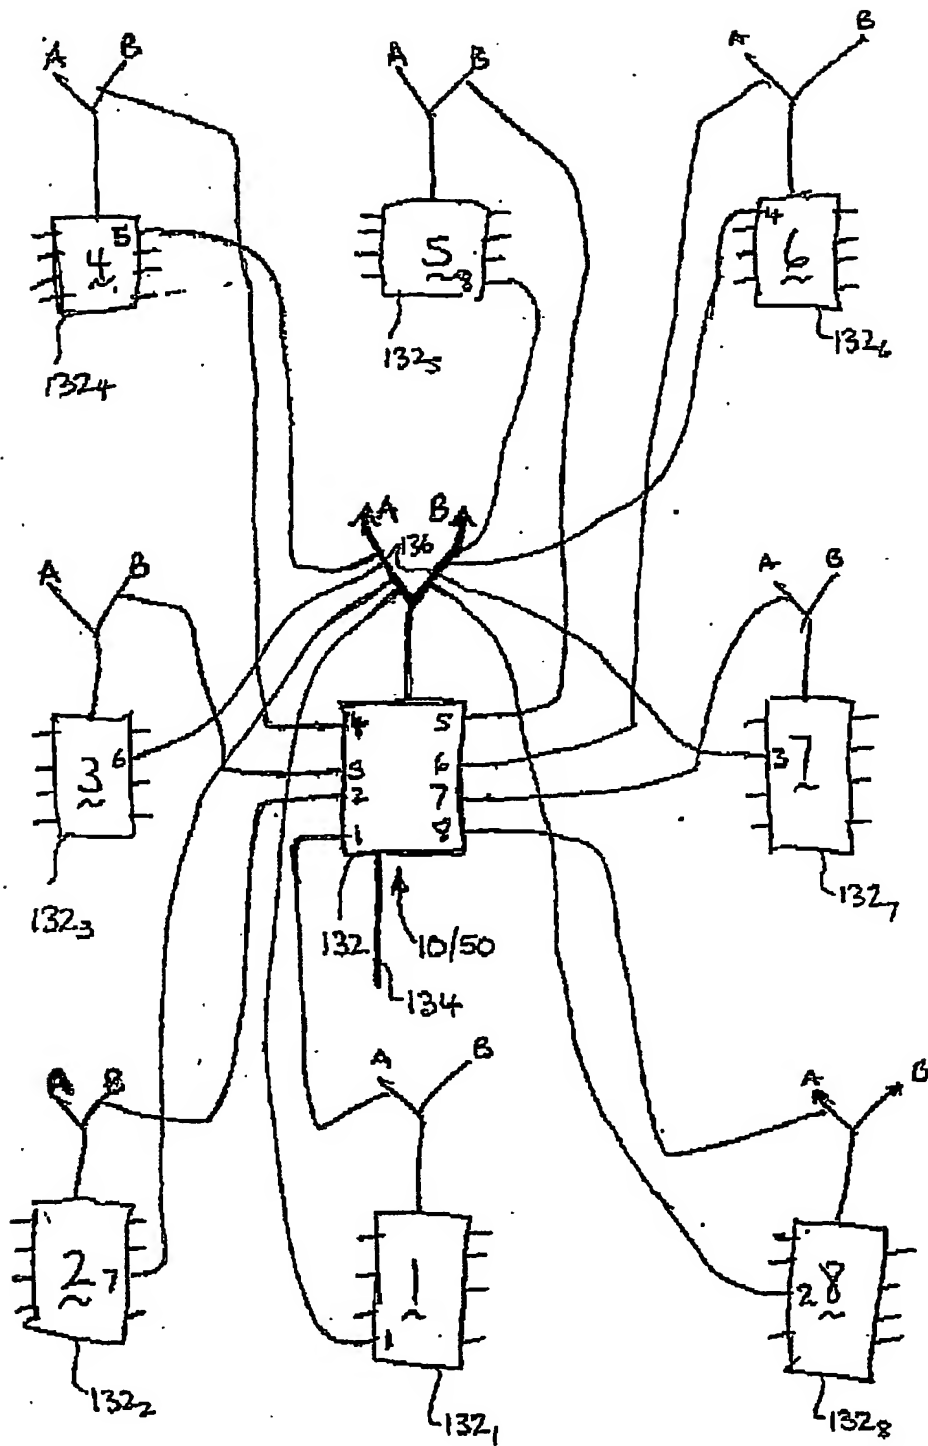


Figure 16

16/17

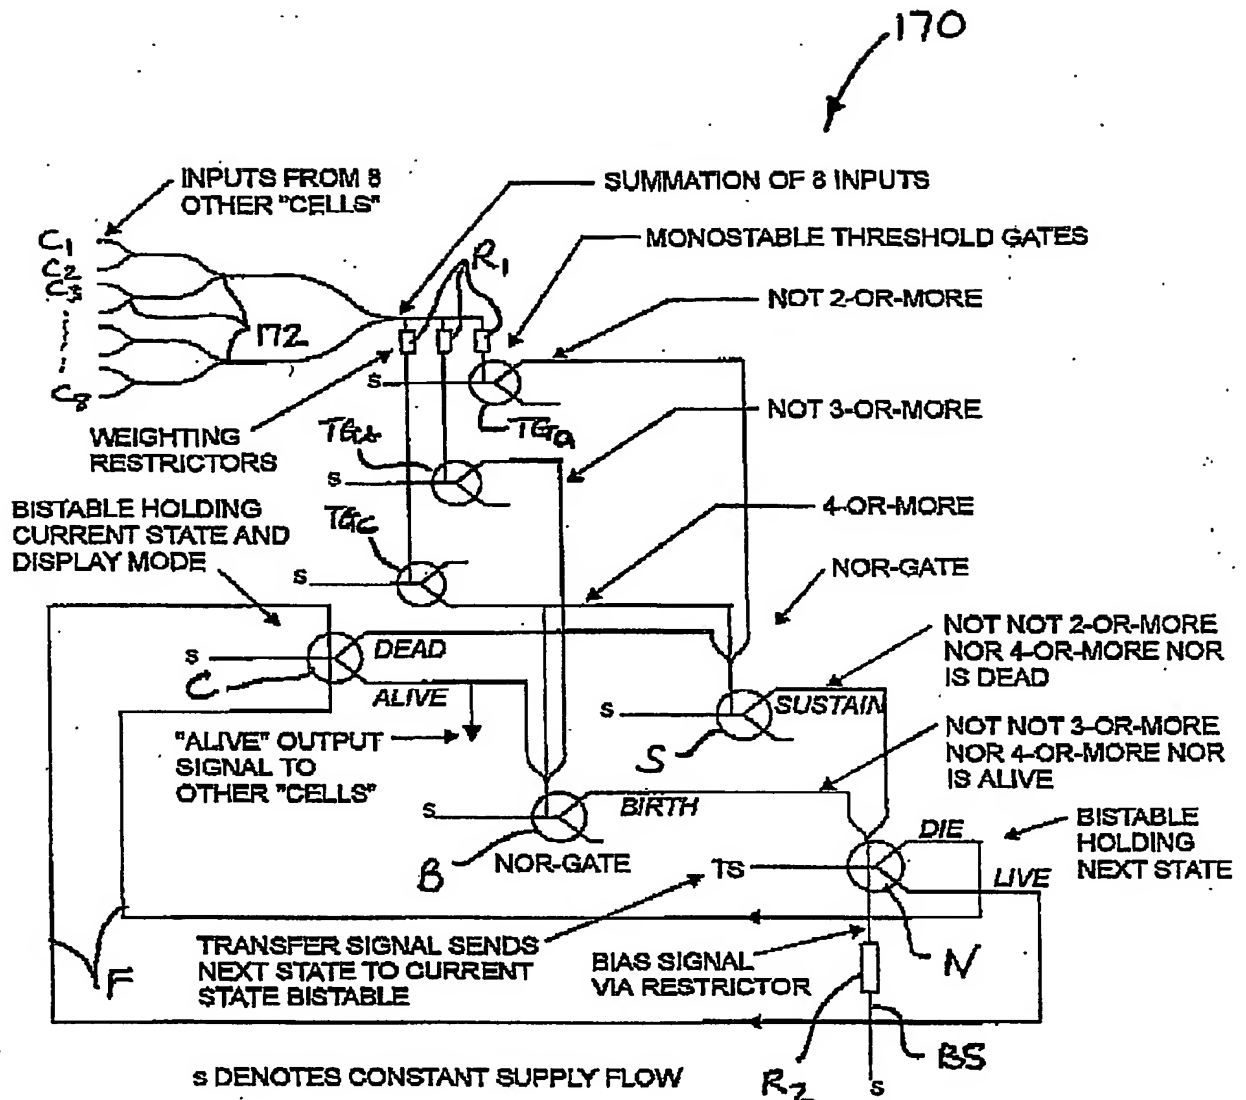


FLUIDIC LOGIC CIRCUIT FOR IMPLEMENTING J H CONWAY'S LIFE CELLULAR AUTOMATON ALGORITHM

Figure 17

life logic.cdr
J R Tippetts
14 Nov 2002

17/17

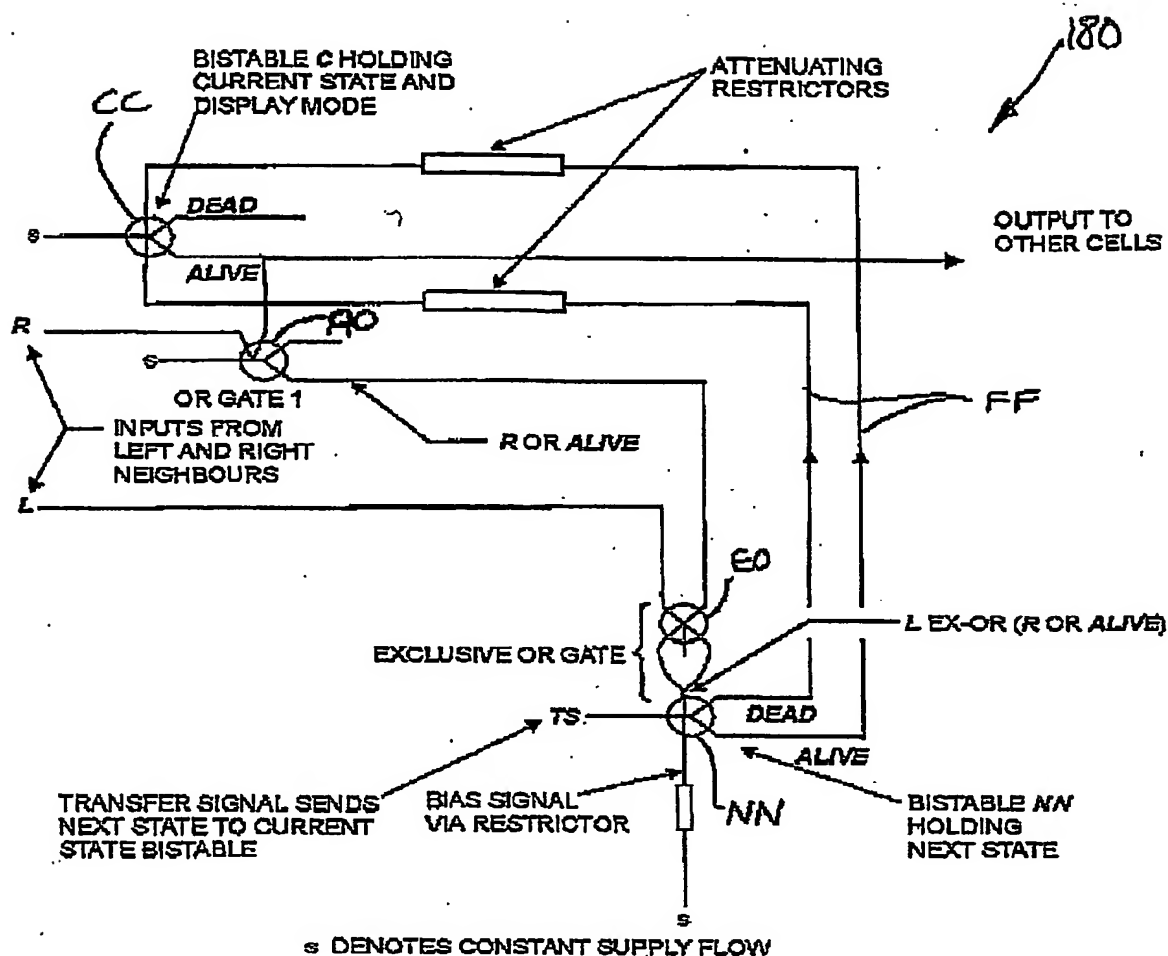

FLUIDIC CIRCUIT FOR IMPLEMENTING STEPHEN WOLFRAM'S "RULE 30" CELLULAR AUTOMATON

Figure 18

PCT Application

GB0305146



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.